


## CONVEYOR NO-LOAD TORQUES

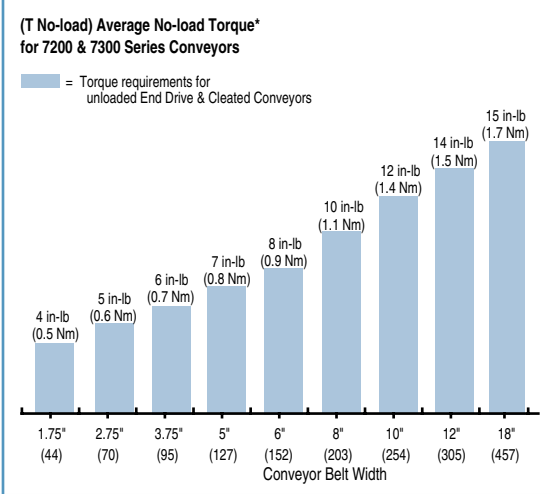

**Note:** The torque required to overcome the conveyor's initial startup inertia may temporarily exceed the average "no-load" torque by a factor of 2-3 times.

\* Stated torques are average values based on Dorner standard belts running at 50' (15 m) per minute.

## MAXIMUM CONVEYOR LOAD CHARTS

