

3200 SERIES: FLAT BELT CENTER DRIVE



Specifications:

- Loads up to 1,000 lbs* (455 kg)
- Belt Speeds up to 600 ft/min (183 m/min)
- Belt widths: 3.75" (95 mm) to 48" (1,219 mm)
- Conveyor lengths: 4' (1,219 mm) to 99' (30,175 mm)
- 16" (406 mm) of belt take-up
- 6" (152 mm) diameter drive pulley turns approximately 18.8" (479 mm) of belt per revolution
- **CE** models available

* Conveyor load capacity depends on conveyor size, incline, motor position, accumulated loads and other factors.

Features & Benefits:

- Quick five-minute belt change
- Center Drive Module frees up both ends of conveyor for operator and machine interface
- The Center Drive Module can be easily repositioned along the length of the conveyor
- Maintenance free pneumatic belt tensioner maintains uniform belt tension (Manual spring tension available)
- V-groove bedplate with guided belt provides positive belt tracking, even under demanding side load applications
- Non V-guided belts use our patented belt tracking cams, offering you the widest belt selection possible
- Strong, box-like construction resists damaging frame twists
- 16" of belt take-up extends conveyor belt life
- Stand mounting brackets and return belt rollers are easily re-positioned along the frame
- Special length conveyors in 0.12" (3 mm) increments at standard price and delivery
- Two T-Slots on each side for easy mounting of pre-engineered accessories





Includes sealed bearings, 1" (25 mm) diameter rollers and is available at both ends for small part transfers.

*Order gearmotor mounting packages and gearmotors separately, see pages 98-109.
For support stands and accessories, see pages 113-122.*

For ordering information, see page 123

3200 SERIES: FLAT BELT CENTER DRIVE

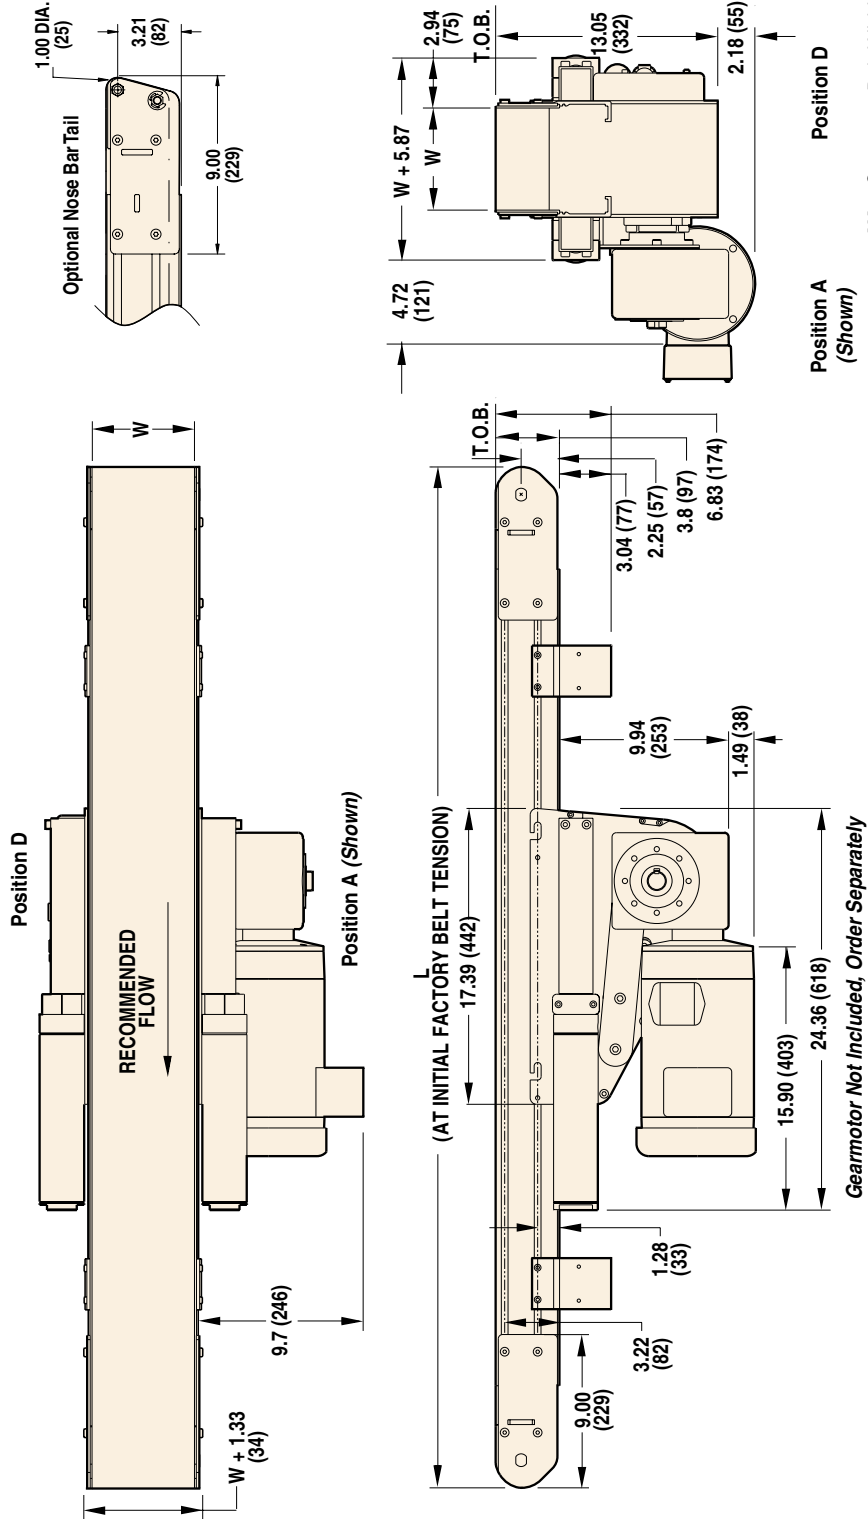

STANDARD SIZES				
Conveyor Width Reference	04	06	02 increments up to...	48
Conveyor Belt Width (W)	3.75" (95mm)	6" (152mm)	2" (51mm) increments up to...	48" (1,219mm)
Conveyor Length Reference	0400		0001 increments up to...	9900
Conveyor Length (L)	4' (1,219mm)		0.12" (3mm) increments up to...	99' (30,175mm)

NOTE: Conveyor longer than 12' (3,658 mm) will be constructed using a multiple piece frame. Consult factory for locations.
NOTE: Conveyors wider than 40" require v-guide belt tracking.

For more information, go to www.dorner.com. Call 800.397.8664 or 262.367.7600.
 Due to the wide variety of drive set ups and applications, point of installation guarding is the responsibility of the end user.