

# QWIK SERIES: Z-FRAME STRAIGHT MODULAR CLEATED BELT

## Specifications:

- Loads up to 1,000 lbs (453 kg)
- Belt speeds up to 250 ft/min (76 m/min)
- Belt widths: 8" (203 mm) to 24" (610 mm)
- Conveyor lengths: 36" (914 mm) to 999" (25,375 mm)
- Standard angles: 5°, 10°, 15°, 30°, 45°, 60°
- Custom angles available in 5° increments
- UHMW wear strip belt supports
- One revolution of the drive pulley moves the belt approximately 12"
- Two T-slots for mounting accessories
- Rigid, 5.8" high, anodized aluminum frame
- Available in 1" and 3" high cleats
- € models available




UHMW Belt  
Tracking Guides



1" and 3"  
Cleats

## Features & Benefits:

- Fewer transfers for less product loss
- QWIK Slots™, make mounting air and electrical lines simple with no drilling, special tools or T-nuts required
- Completely contained belt eliminates catenary sag and reduces pinch points
- Designed-in low voltage wireway provides support and protection for low voltage wires running from the electronic device to the main junction or control box
- Drive and tail assemblies require no holes in side rails making reconfiguration quick and easy
- Open top frame simplifies belt maintenance and replacement
- Sprocket alignment key provides continuous sprocket alignment for quick belt assembly
- Support stands mount directly to bottom of side rail which keeps frame open for mounting accessories

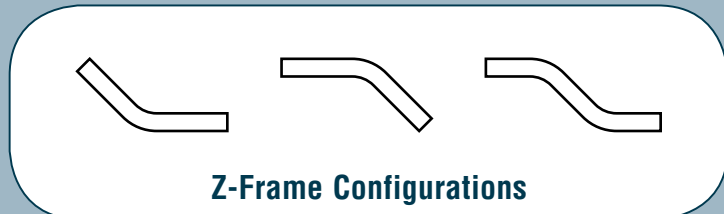

Z-Frame Configurations

Order gearmotor mounting packages and gearmotors separately; see pages 150-159. For support stands and accessories, see pages 163-169.

For ordering information, see page 170

