


# DORNER® QWIK CONVEYORS 5200 SERIES: Flat Belt End Drive

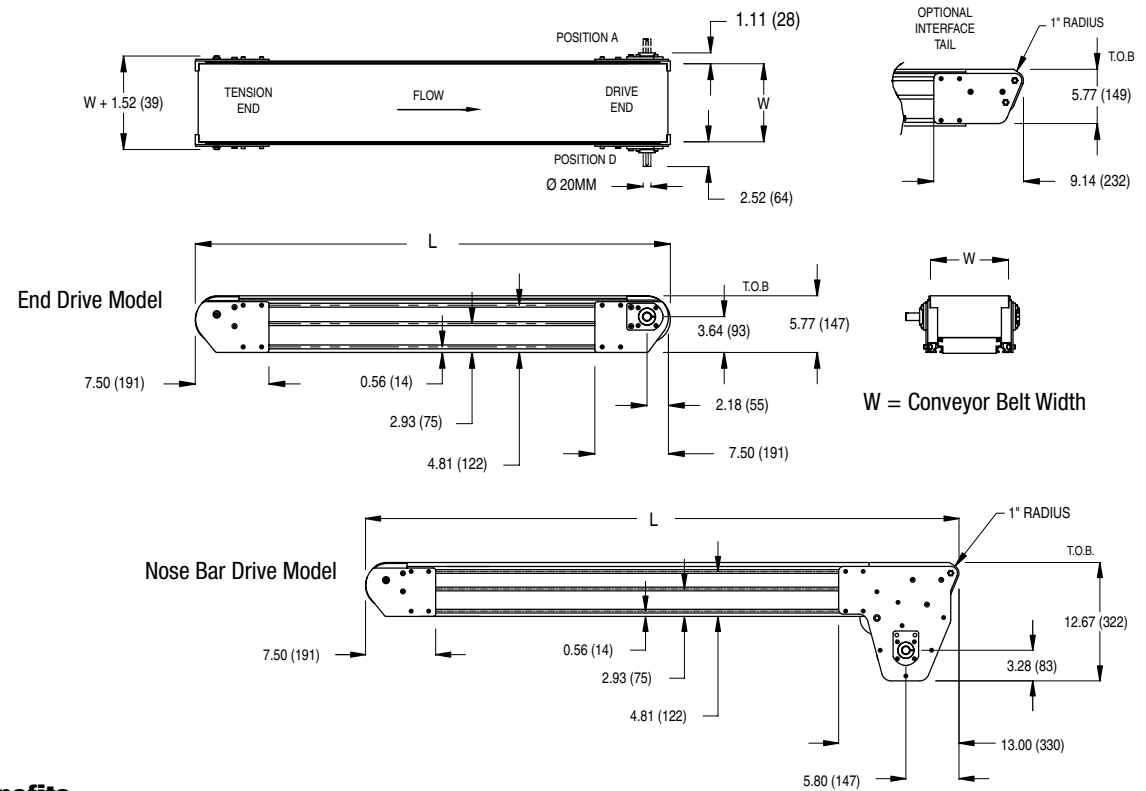

## 5200 Specifications:

- Loads up to 1000 lbs. (455 kg)
- Belt speeds up to 260 ft/min (80 m/min)
- Belt widths: 8" to 60" (203mm to 1524mm) in 2" increments
- Conveyor lengths: 36" to 999" (914mm to 25,375mm) in 1" increments
- UHMW wear strips
- 4.3" diameter drive and idler pulleys
- T-slots for mounting accessories
- Rigid, 5.8" high, anodized aluminum frame
- Available in friction top belts\* up to 24" (610 mm) wide

## Features & Benefits:

- QWIK Slots™ make mounting air and electrical lines simple with no drilling, special tools or t-nuts required
- Completely contained belt eliminates catenary sag and reduces pinch points
- Designed-in low voltage wireway provides support and protection for low voltage wires running from the electronic device to the main junction or control box
- No holes in side rails makes reconfiguration quick and easy
- Open top frame simplifies belt maintenance and replacement
- Sprocket alignment key provides continuous sprocket alignment for quick belt assembly
- Support stands mount directly to bottom of side rail which keeps frame open for mounting accessories
- Nose bar tail option

Conveyor load capacity depends on conveyor size, incline, motor position, accumulated loads and other factors.