



Conversion of 2200 Tail Assemblies to New Design

Installation Manual



DORNER MFG. CORP.
P.O. Box 20 • 975 Cottonwood Ave.
Hartland, WI 53029-0020 USA

INSIDE THE USA
TEL: 1-800-397-8664
FAX: 1-800-369-2440

OUTSIDE THE USA
TEL: 262-367-7600
FAX: 262-367-5827

For other service manuals visit our website at:
www.dorner.com/service_manuals.asp

Table of Contents

Introduction	2	2200 Series Center Drive Conveyor New Design Tail	
Warnings - General Safety	3	Installation Instructions	7
Installation	4	Return Policy.....	10
2200 Series End Drive Conveyor New Design Tail			
Installation Instructions.....	4		

Dorner has re-engineered the 2200 tail assembly, which includes the pulley and tail plates. The tail plates are the components that retain the pulley bearings and connect the pulley to the conveyor frame. The new design delivers added strength and easier bearing replacement.

The improved design incorporates new tail plates and pulleys while using the current bearings. The new tail plates are solid versus the current tail plate that has a thru hole with a dust cover. This solid design provides the improved tail

plate strength. A clearance hole will be created in the proper tail plate for the conveyor drive shaft. The new pulleys now utilize pressed-on bearings versus the current taper screw design. Current tail plates and pulleys can not be inter-mixed with new tail plates and pulleys.

Effective October 1, 2004 all orders received for 2200 conveyors, parts kits and parts will incorporate this new design.

Introduction

IMPORTANT

<i>Some illustrations may show guards removed. DO NOT operate equipment without guards.</i>

Upon receipt of shipment:

- Compare shipment with packing slip. Contact factory regarding discrepancies.
- Inspect packages for shipping damage. Contact carrier regarding damage.
- Accessories may be shipped loose. See accessory instructions for installation.

Dorner's Limited Warranty applies.

Dorner has convenient, pre-configured kits of Key Service Parts for all conveyor products. These time saving kits are easy to order, designed for fast installation, and guarantee you will have what you need when you need it. Key Parts and Kits are marked in the Service Parts section of this manual with the Performance Parts Kits  logo.

Dorner 2200 series conveyors are covered by Patent Numbers 5,174,435, 6,298,981, 6,422,382 and corresponding patents and patent applications in other countries.

Dorner reserves the right to make changes at any time without notice or obligation.

Warnings - General Safety

⚠ WARNING

The safety alert symbol, black triangle with white exclamation, is used to alert you to potential personal injury hazards.

⚠ DANGER



Climbing, sitting, walking or riding on conveyor will cause severe injury.
KEEP OFF CONVEYORS.

⚠ DANGER



DO NOT OPERATE CONVEYORS IN AN EXPLOSIVE ENVIRONMENT.

⚠ WARNING



Exposed moving parts can cause severe injury.
LOCK OUT POWER before removing guards or performing maintenance.

⚠ WARNING



Gearmotors may be **HOT**.
DO NOT TOUCH Gearmotors.

⚠ WARNING



Dorner cannot control the physical installation and application of conveyors. Taking protective measures is the responsibility of the user.

When conveyors are used in conjunction with other equipment or as part of a multiple conveyor system, **CHECK FOR POTENTIAL PINCH POINTS** and other mechanical hazards before system start-up.

⚠ WARNING



Loosening stand height or angle adjustment screws may cause conveyor sections to drop down, causing severe injury.

When conveyors are used in conjunction with other equipment or as part of a multiple conveyor system, **CHECK FOR POTENTIAL PINCH POINTS** and other mechanical hazards before system start-up.

SUPPORT CONVEYOR SECTIONS PRIOR TO LOOSENING STAND HEIGHT OR ANGLE ADJUSTMENT SCREWS.

Installation

2200 Series End Drive Conveyor New Design Tail Installation Instructions

1. Locate new idler spindle and (1) RH and (1) LH head plate.



Figure 1

2. Loosen (4) idler end head plate clamp screws.



Figure 2

3. Collapse idler end.



Figure 3

4. Remove (4) idler end head plate clamp screws and remove old tail assembly through the conveyor belt.



Figure 4

5. Install a new head plate on one side of the conveyor.



Figure 5

- Slide the new idler spindle through the belt and into the head plate on the opposite side.



Figure 6

- Install the second head plate. Leave the (4) head plate mounting screws finger tight.
- Locate the new drive spindle and (1) RH and (1) LH head plate.



Figure 7

- Remove the drive cover. (Bottom drive shown, top drive similar.)



Figure 8

- Loosen timing belt tensioner and remove timing belt.



Figure 9

- Loosen (2) set screws and remove timing belt pulley.

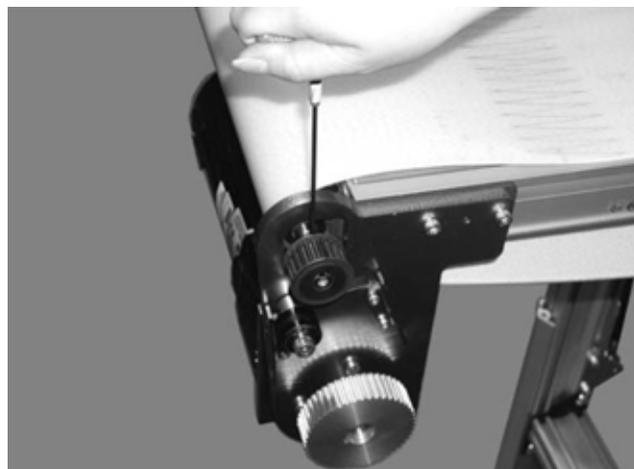


Figure 10

- Remove (2) drive mounting screws and drive assembly.



Figure 11

Installation

13. Remove (2) head plate mounting screws from opposite side of conveyor.



Figure 12

14. Remove drive end tail assembly through the conveyor belt.



Figure 13

15. Install the new head plate on the non-drive shaft side of the conveyor.



Figure 14

16. Slide the new drive spindle through the conveyor belt and into the head plate on the opposite side.



Figure 15

17. Install the second head plate on the drive shaft corner.
18. Re-install the drive mount assembly, timing belt pulley, timing belt and drive cover by reversing the previous steps.
19. Tighten conveyor belt. On tension end of the conveyor, identified with a  label (Figure 16, item D), adjust head plate assembly (C): On both sides of conveyor, loosen fastening screws (A) and rotate pinion gear (E) to adjust head plate assembly.

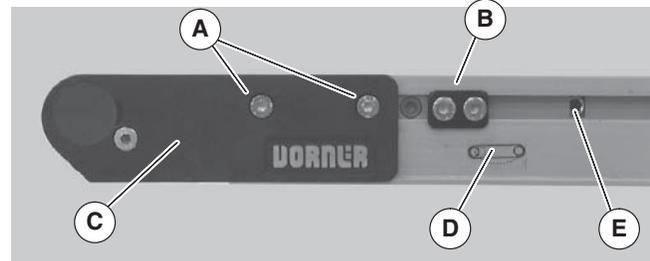


Figure 16

20. Adjust head plate assembly so end of conveyor frame aligns with or between the head plate tensioning marks (Figure 17, item F) and (Figure 17, item G). Replace belt if proper tensioning can not be obtained while aligning the end of the conveyor frame with or between the tensioning marks. See NOTE.



Figure 17

NOTE

On pinion gear, do not exceed a torque of 25 in-lb (2.8 Nm) for 2 – 12" (51 – 305 mm) wide conveyors and 50 in-lb (5.6 Nm) for an 18 – 24" (457 – 610 mm) wide conveyor. Over tensioning the conveyor belt could cause excessive pulley bearing load and early failure.

21. After adjusting proper tensioning, tighten fastening screws (Figure 16, item A) on both sides of conveyor to 60 in-lb (7 Nm).

2200 Series Center Drive Conveyor New Design Tail Installation Instructions

1. Locate new idler spindle and (1) RH and (1) LH head plate.



Figure 18

2. Loosen (4) idler end head plate clamp screws.

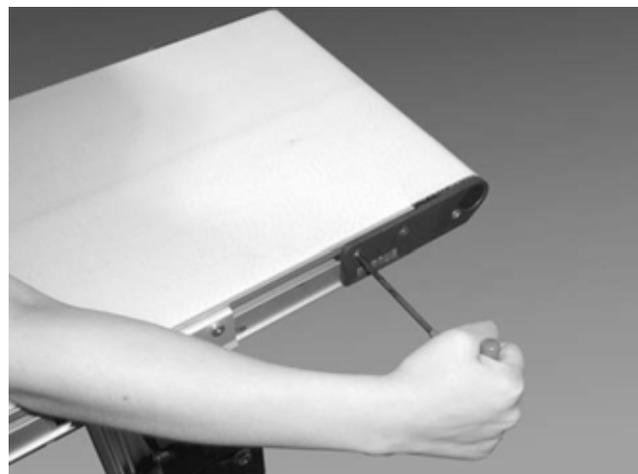


Figure 19

3. Collapse idler end.



Figure 20

Installation

- Remove (4) idler end head plate clamp screws and remove old tail assembly through the conveyor belt.



Figure 21

- Install a new head plate on one side of the conveyor.



Figure 22

- Slide the new idler spindle through the belt and into the head plate on the opposite side.



Figure 23

- Install the second head plate. Leave the (4) head plate mounting screws finger tight.

- Repeat steps 1 through 7 on the Fixed end tail assembly.
- Tighten conveyor belt. On tension end of the conveyor, identified with a  label (Figure 24, item D), adjust head plate assembly (C): On both sides of conveyor, loosen fastening screws (A) and rotate pinion gear (E) to adjust head plate assembly.

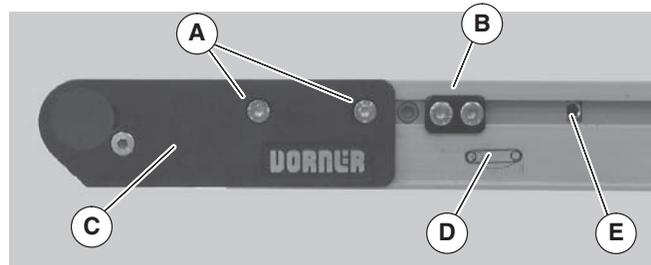


Figure 24

- Adjust head plate assembly so end of conveyor frame aligns with or between the head plate tensioning marks (Figure 25, item F) and (Figure 25, item G). Replace belt if proper tensioning can not be obtained while aligning the end of the conveyor frame with or between the tensioning marks. See NOTE.



Figure 25

NOTE

On pinion gear, do not exceed a torque of 25 in-lb (2.8 Nm) for 2 – 12" (51 – 305 mm) wide conveyors and 50 in-lb (5.6 Nm) for an 18 – 24" (457 – 610 mm) wide conveyor. Over tensioning the conveyor belt could cause excessive pulley bearing load and early failure.

- After adjusting proper tensioning, tighten fastening screws (Figure 24, item A) on both sides of conveyor to 60 in-lb (7 Nm).

Return Policy

Returns must have prior written factory authorization or they will not be accepted. Items that are returned to Dorner without authorization will not be credited nor returned to the original sender. When calling for authorization, please have the following information ready for the Dorner factory representative or your local distributor:

1. Name and address of customer.
2. Dorner part number(s) of item(s) being returned.
3. Reason for return.
4. Customer's original order number used when ordering the item(s).
5. Dorner or distributor invoice number.

A representative will discuss action to be taken on the returned items and provide a Returned Goods Authorization number for reference.

There will be a return charge on all new undamaged items returned for credit where Dorner was not at fault. Dorner is not responsible for return freight on such items.

Conveyors and conveyor accessories	
Standard catalog conveyors	30%
MPB Series, cleated and specialty belt conveyors	50%
7400 & 7600 Series conveyors	non-returnable items
Engineered special products	case by case
Drives and accessories	30%
Sanitary stand supports	non-returnable items

Parts	
Standard stock parts	30%
MPB, cleated and specialty belts	non-returnable items

Returns will not be accepted after 60 days from original invoice date.

The return charge covers inspection, cleaning, disassembly, disposal and reissuing of components to inventory.

If a replacement is needed prior to evaluation of returned item, a purchase order must be issued. Credit (if any) is issued only after return and evaluation is complete.

Dorner has representatives throughout the world. Contact Dorner for the name of your local representative. Our Technical Sales, Catalog Sales and Service Teams will gladly help with your questions on Dorner products.

For a copy of Dorner's Warranty, contact factory, distributor, service center or visit our website at www.dorner.com.

For replacement parts, contact an authorized Dorner Service Center or the factory.



Dorner Mfg. Corp. reserves the right to change or discontinue products without notice. All products and services are covered in accordance with our standard warranty. All rights reserved. © Dorner Mfg. Corp. 2006

DORNER MFG. CORP.

975 Cottonwood Ave., PO Box 20
Hartland, WI 53029-0020 USA
USA
TEL 1-800-397-8664 (USA)
FAX 1-800-369-2440 (USA)
Internet: www.dorner.com

Outside the USA:
TEL 1-262-367-7600
FAX 1-262-367-5827