



3200 & LPZ Series Bottom Mount Drive Package for Light & Standard Load 60 Hz Gearmotors

Installation, Maintenance & Parts Manual



DORNER MFG. CORP.
P.O. Box 20 • 975 Cottonwood Ave.
Hartland, WI 53029-0020 USA

INSIDE THE USA
TEL: 1-800-397-8664
FAX: 1-800-369-2440

OUTSIDE THE USA
TEL: 262-367-7600
FAX: 262-367-5827

For other service manuals visit our website at:
www.dorner.com/service_manuals.asp

Table of Contents

Introduction	2	Drive or Driven Pulley Replacement	10
Warnings - General Safety	3	Gear Reducer Replacement	10
Product Description	4	Motor Replacement	12
Specifications	4	Service Parts.....	13
Installation	6	3200 Series Conveyors Bottom Mount Drive Package for	
Required Tools.....	6	Standard Load 90° Industrial Gearmotors.....	13
Mounting.....	6	3200 Standard Load 90° Industrial Gearmotors.....	14
Preventive Maintenance and Adjustment.....	9	Notes	15
Required Tools.....	9	Return Policy.....	16
Timing Belt Tensioning.....	9		
Timing Belt Replacement.....	9		

Introduction

IMPORTANT

<i>Some illustrations may show guards removed. DO NOT operate equipment without guards.</i>

Upon receipt of shipment:

- Compare shipment with packing slip. Contact factory regarding discrepancies.
- Inspect packages for shipping damage. Contact carrier regarding damage.
- Accessories may be shipped loose. See accessory instructions for installation.

Dorner 3200 Series conveyors are covered by patent numbers 5156260, 5156261, 5203447, 5265714 and patent applications in other countries.

Dorner LPZ Series conveyors are covered by patent numbers 5156260, 5156261, 5203447, 5265714, 5875883 and patent applications in other countries.

Dorner's Limited Warranty applies.

Dorner reserves the right to make changes at any time without notice or obligation.

Dorner has convenient, pre-configured kits of Key Service Parts for all conveyor products. These time saving kits are easy to order, designed for fast installation, and guarantee you will have what you need when you need it. Key Parts and Kits are marked in the Service Parts section of this manual with the Performance Parts Kits  logo.

Warnings - General Safety

WARNING

The safety alert symbol, black triangle with white exclamation, is used to alert you to potential personal injury hazards.

DANGER



Climbing, sitting, walking or riding on conveyor will cause severe injury.
KEEP OFF CONVEYORS.

DANGER



DO NOT OPERATE CONVEYORS IN AN EXPLOSIVE ENVIRONMENT.

WARNING



Exposed moving parts can cause severe injury.
LOCK OUT POWER before removing guards or performing maintenance.

WARNING



Gearmotors may be **HOT**.
DO NOT TOUCH Gearmotors.

WARNING



Exposed moving parts can cause severe injury.
REPLACE ALL GUARDS BEFORE RUNNING CONVEYOR.

WARNING



Dorner cannot control the physical installation and application of conveyors. Taking protective measures is the responsibility of the user.
When conveyors are used in conjunction with other equipment or as part of a multiple conveyor system, **CHECK FOR POTENTIAL PINCH POINTS** and other mechanical hazards before system start-up.

Product Description

Refer to Figure 1 for typical components.

- | | |
|---|-----------------------|
| A | Conveyor |
| B | Mounting Bracket |
| C | Gearmotor |
| D | Timing Belt Tensioner |
| E | Cover |
| F | Timing Belt |
| G | Drive Pulley |
| H | Driven Pulley |

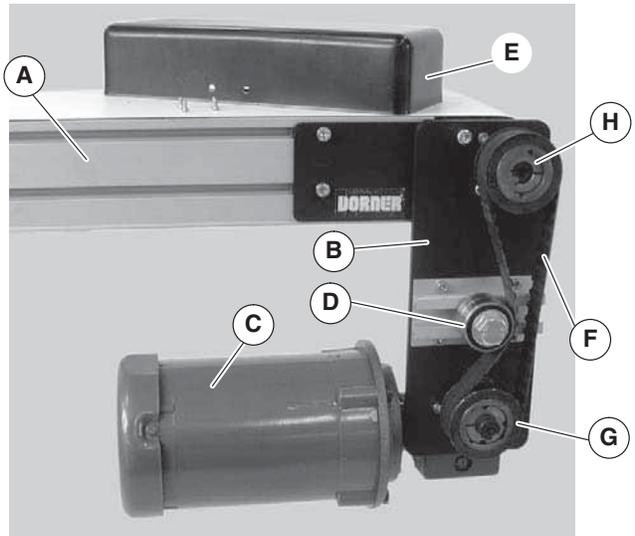


Figure 1

Specifications

Gearmotor Mounting Package Models:

Example:

- 32 M B H S A - 16 16
- Driven Pulley (see Table 2, 3 & 4)
 - Drive Pulley (see Table 2, 3 & 4)
 - Belt Type (- = flat belt, A through J = cleated belt)
 - Mount Position = A, B, C or D (see detail to the right)
 - Gearmotor Type: S = Standard Load
L = Light Load
 - Output Shaft Type = 90° Industrial
 - Mount Style = Bottom Mount
 - Language Code = U.S. English

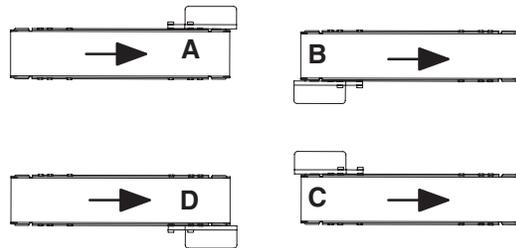


Table 1: Gearmotor Specifications

Item	Light Load Gearmotor			Standard Load Gearmotor			
	Single-Phase	Three Phase	DC Variable Speed	Single-Phase	Three Phase	VFD Variable Speed	DC Variable Speed
Output Power	0.25 hp (0.19 kw)			0.5 hp (0.37 kw)			
Input Voltage	115 VAC	208 – 230/460 VAC	130VDC	115 VAC	208 – 230/460 VAC	230 VAC	90VDC
Input Frequency	60Hz		N/A	60Hz		10 – 60Hz	N/A
Input Current (Amperes)	5.0	1.2/0.6	2.2	7.4	2.1 – 2/1	1.6	5.0
Gearmotor Ratios	5:1, 10:1, 20:1, 40:1, 60:1			5:1, 10:1, 20:1, 40:1, 60:1			
Frame Size	NEMA 42CZ			NEMA 56C			
Motor Type	Totally enclosed, Fan cooled			Totally enclosed, Fan cooled			

Specifications

Table 2: Belt Speeds for Fixed Speed 90° 60 Hz Gearmotors

Light Load Gearmotors				Standard Load Gearmotors				Belt Speed		Drive Pulley	Driven Pulley
Part Number	RPM	In-lb	N-m	Part Number	RPM	In-lb	N-m	Ft/min	M/min		
32M060HL4(vp)FN	29	226	25.5	32M060HS4(vp)FN	29	226	25.5	23	7.0	16	16
32M040HL4(vp)FN	43	237	26.8	32M040HS4(vp)FN	43	247	27.9	34	10.4	16	16
32M040HL4(vp)FN	43	237	26.8	32M040HS4(vp)FN	43	247	27.9	52	15.8	24	16
32M020HL4(vp)FN	86	142	16	32M020HS4(vp)FN	86	248	27.9	69	21.0	16	16
32M020HL4(vp)FN	86	142	16	32M020HS4(vp)FN	86	248	27.9	103	31.4	24	16
32M010HL4(vp)FN	173	78	8.8	32M010HS4(vp)FN	173	156	17.6	137	41.8	16	16
32M010HL4(vp)FN	173	78	8.8	32M010HS4(vp)FN	173	156	17.6	172	52.4	20	16
32M010HL4(vp)FN	173	78	8.8	32M010HS4(vp)FN	173	156	17.6	206	62.8	24	16
N/A	N/A	N/A	N/A	32M005HS4(vp)FN	345	81	9.1	275	83.8	16	16
N/A	N/A	N/A	N/A	32M005HS4(vp)FN	345	81	9.1	343	104.5	20	16
N/A	N/A	N/A	N/A	32M005HS4(vp)FN	345	81	9.1	412	125.6	24	16

(vp) = voltage and phase

23 = 208 – 230/460 V, 3-phase

11 = 115 V, 1-phase

Table 3: Belt Speeds for Variable Speed 90° DC Gearmotors

Light Load Gearmotors				Standard Load Gearmotors				Belt Speed		Drive Pulley	Driven Pulley
Part Number	RPM	In-lb	N-m	Part Number	RPM	In-lb	N-m	Ft/min	M/min		
32M060HLD3DEN	42	198	22.4	32M060HSD9DEN	42	198	22.4	4.0 – 33	1.2 – 10	16	16
32M040HLD3DEN	63	163	18.4	32M040HSD9DEN	63	215	24.3	6.0 – 50	1.8 – 15	16	16
32M040HLD3DEN	63	163	18.4	32M040HSD9DEN	63	215	24.3	9.0 – 75	2.7 – 23	24	16
32M020HLD3DEN	125	98	11.1	32M020HSD9DEN	125	196	22.1	12 – 100	3.6 – 30	16	16
32M020HLD3DEN	125	98	11.1	32M020HSD9DEN	125	196	22.1	18 – 150	5.5 – 45	24	16
32M010HLD3DEN	250	54	6.1	32M010HSD9DEN	250	108	12.2	24 – 200	7.3 – 61	16	16
32M010HLD3DEN	250	54	6.1	32M010HSD9DEN	250	108	12.2	30 – 250	9.1 – 76	20	16
32M010HLD3DEN	250	54	6.1	32M010HSD9DEN	250	108	12.2	36 – 300	11 – 92	24	16

Table 4: Belt Speeds for Fixed Speed 90° VFD Gearmotors

Standard Load Gearmotors				Belt Speed		Drive Pulley	Driven Pulley
Part Number	RPM	In-lb	N-m	Ft/min	M/min		
32M060HS423EN	29	226	25.5	2.3 – 22.9	0.7 – 7.0	16	16
32M040HS423EN	43	247	27.9	3.4 – 34.3	1.0 – 10.5	16	16
32M040HS423EN	43	247	27.9	5.1 – 51.5	1.6 – 15.7	24	16
32M020HS423EN	86	248	27.9	6.9 – 68.6	2.1 – 20.9	16	16
32M020HS423EN	86	248	27.9	10.3 – 103.0	3.1 – 31.4	24	16
32M010HS423EN	173	156	17.6	13.7 – 137.3	4.2 – 41.9	16	16
32M010HS423EN	173	156	17.6	17.2 – 171.6	5.2 – 52.3	20	16
32M010HS423EN	173	156	17.6	20.6 – 205.9	6.3 – 62.8	24	16
32M005HS423EN	345	81	9.1	27.5 – 274.6	8.4 – 83.7	16	16
32M005HS423EN	345	81	9.1	34.3 – 343.2	10.5 – 104.6	20	16
32M005HS423EN	345	81	9.1	41.2 – 411.9	12.6 – 125.6	24	16

NOTE

For belt speed other than those listed, contact factory for details.

Installation

Required Tools

- Hex key wrenches:
2 mm, 2.5 mm, 3 mm, 5 mm
- Straight edge
- Torque wrench

Mounting

⚠ WARNING



Exposed moving parts can cause severe injury.
LOCK OUT POWER before removing guards or performing maintenance.

⚠ WARNING



For Cleated Belt Conveyors, Gearmotors must be mounted as shown in Figure 2. Failure to do so creates pinch points which can cause severe injury.

NOTE

Gearmotor position on Flat Belt conveyor shown below left, Figure 2. Gearmotor position on Cleated Belt conveyor shown below right, Figure 2.

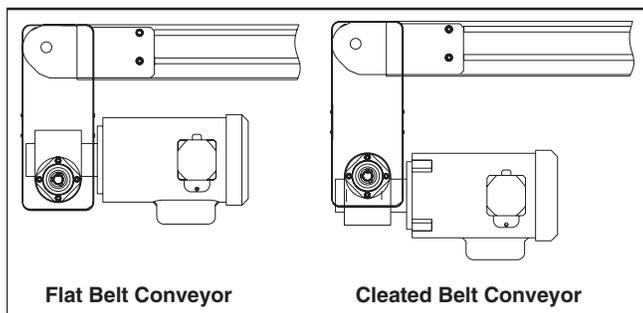


Figure 2

Installation Component List:

I	Bottom Mount Assembly
J	Drive Pulley
K	Cover
L	M4 Socket Head Screws (4x)
M	Driven Pulley
N	Key
O	M6 Socket Head Screws (4x)
P	M8 Socket Head Screws (2x)
Q	Timing Belt

1. Typical components (Figure 3)

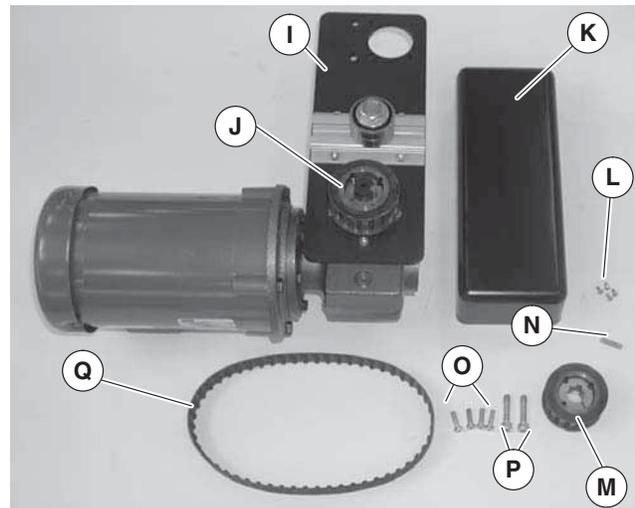


Figure 3

NOTE

Cleated belt mounting package shown, flat belt mounting package similar.

NOTE

Gearmotor may be operated in positions 1, 3 or 4 (Figure 4).

Installation

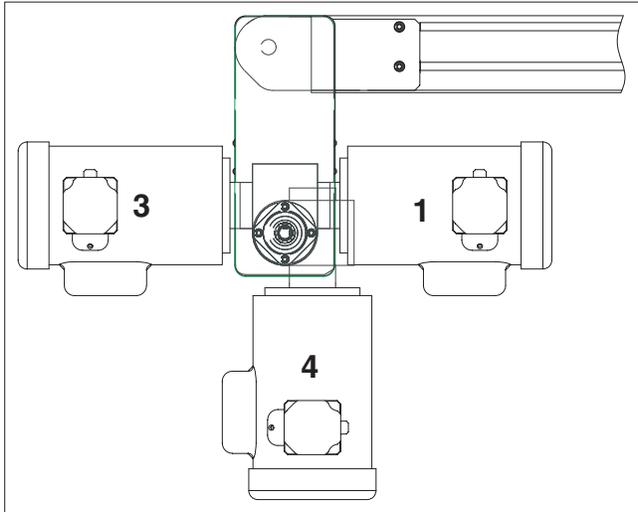


Figure 4

2. If required, change gearmotor position by removing four (4) screws (Figure 5, item R). Rotate gearmotor to other position and replace screws (R). Tighten to 110 in-lb (12 Nm).

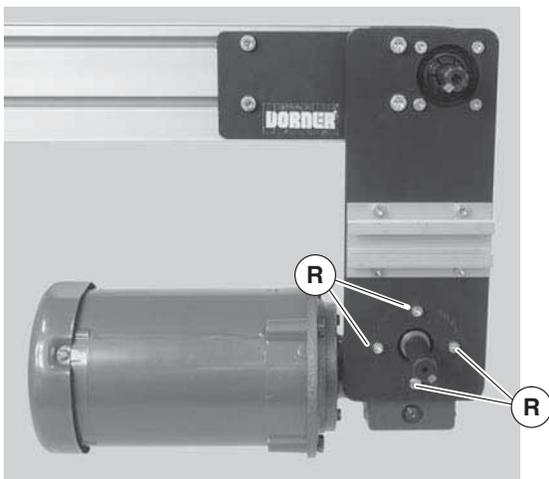


Figure 5

3. Locate drive output shaft (Figure 6, item U). Remove two (2) M8 screws (T) and four (4) M6 screws (S) and discard.

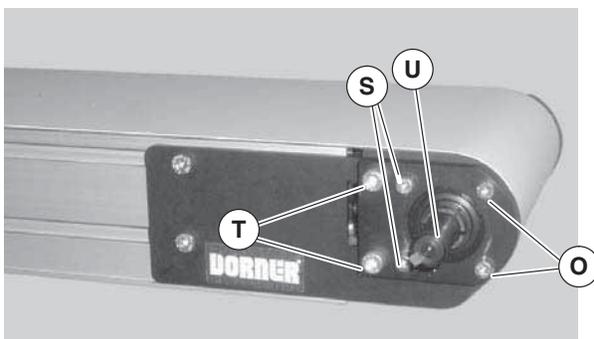


Figure 6

4. Attach mount assembly (Figure 7, item I) with two (2) M8 screws (P) and four (4) M6 screws (O). Tighten M6 screws (O) to 146 in-lbs (16.5 N-m) and M8 screws (P) to 288 in-lbs (32.5 N-m).

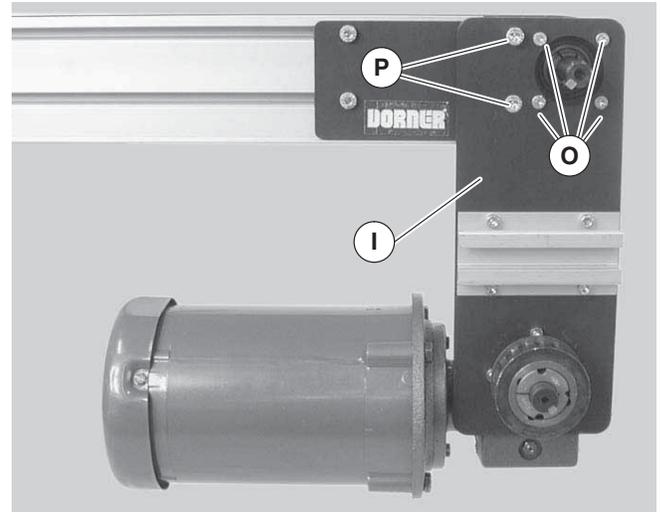


Figure 7



5. Install key (Figure 8, item N).

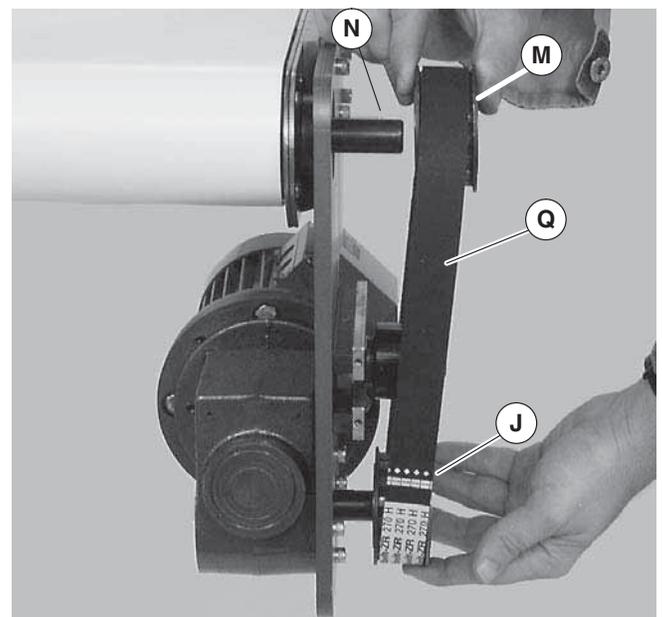


Figure 8

Installation

- Wrap timing belt (Q) around driven pulley (M) and drive pulley (J). Install driven pulley (M) onto conveyor shaft.
- Using a straight edge (Figure 9, item V), align driven pulley (M) with drive pulley (J). Tighten driven pulley taper-lock screws (Figure 10, item W).
- Install cover (Figure 12, item K) with four (4) screws (L). Tighten screws to 35 in-lb (4 Nm).

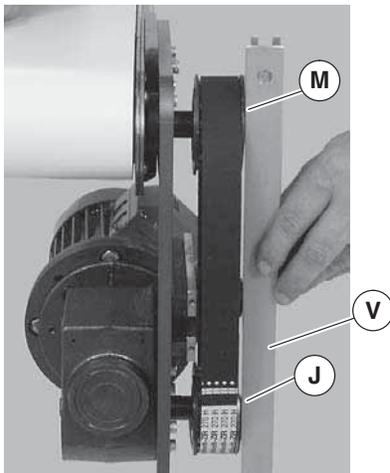


Figure 9

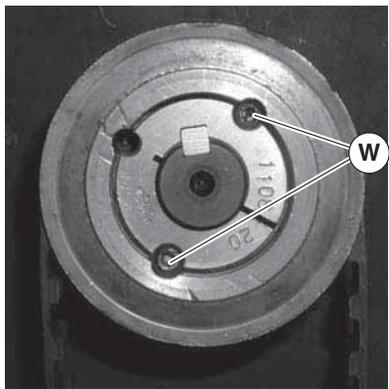


Figure 10

- Depending on conveyor belt travel (direction 1 or 2), locate timing belt tensioner (Figure 11, item X) as shown. Tension timing belt to obtain 1/8" (3 mm) deflection for 6 lb (3 Kg) of force at timing belt mid-point (Y). Tighten tensioner screw to 110 in-lb (12 Nm).

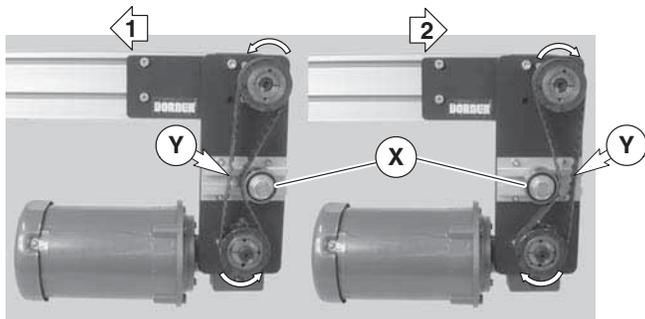


Figure 11

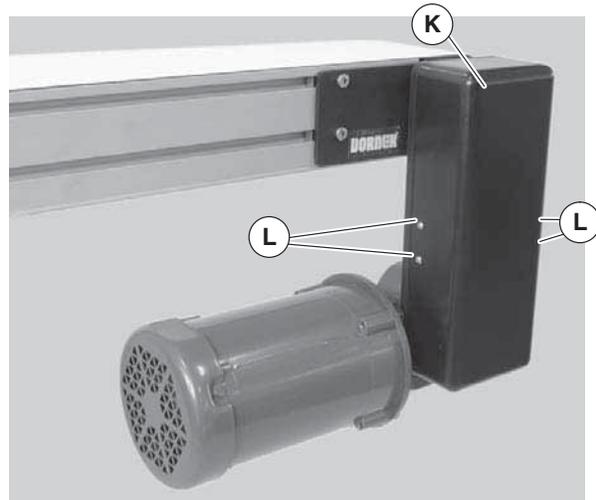


Figure 12

Preventive Maintenance and Adjustment

Required Tools

- Hex key wrenches:
2 mm, 2.5 mm, 3 mm, 5 mm
- Adjustable wrench (for hexagon head screws)
- Straight edge
- Torque wrench

Timing Belt Tensioning

⚠ WARNING

Exposed moving parts can cause severe injury. LOCK OUT POWER before removing guards or performing maintenance.

1. Remove four (4) screws (Figure 12, item L) and remove cover (K).
2. Loosen tensioner (Figure 13, item X).

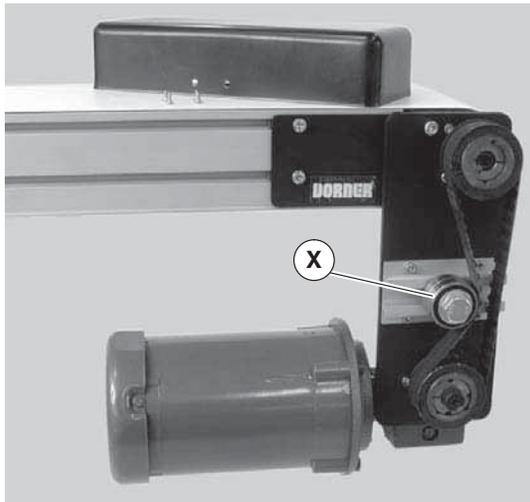


Figure 13

3. Depending on conveyor belt travel (direction 1 or 2), locate timing belt tensioner (Figure 11, item X) as shown. Tension timing belt to obtain 1/8" (3 mm) deflection for 6 lb (3 Kg) of force at timing belt midpoint (Y). Tighten tensioner screw to 110 in-lb (12 Nm).
4. Install cover (Figure 12, item K) with four (4) screws (L). Tighten screws to 35 in-lb (4 Nm).

Timing Belt Replacement

⚠ WARNING

Exposed moving parts can cause severe injury. LOCK OUT POWER before removing guards or performing maintenance.

1. Remove four (4) screws (Figure 12, item L) and remove cover (K).
2. Loosen tensioner (Figure 13, item X).
3. Remove timing belt (Figure 14, item Q).

NOTE
<i>If timing belt does not slide over pulley flange, loosen driven pulley taper-lock screws (Figure 14, item W) and remove pulley with belt (Q). For re-installation, see steps 6 and 7 on beginning on page 8.</i>

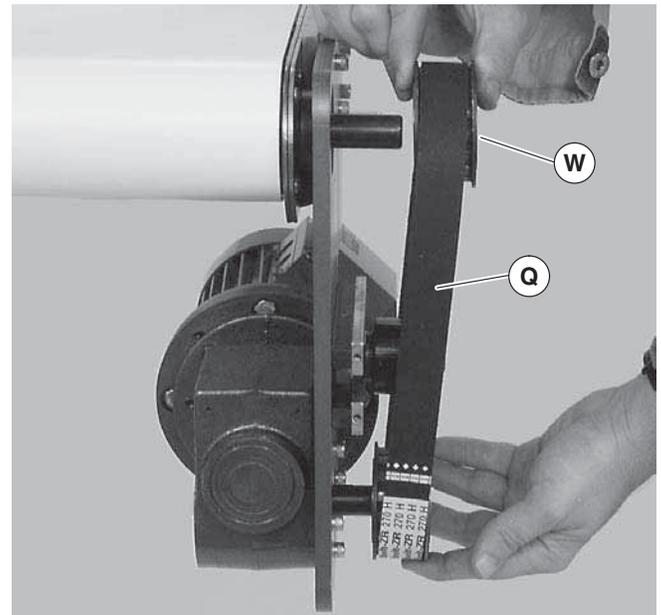


Figure 14

4. Install new timing belt.
5. Depending on conveyor belt travel (direction 1 or 2), locate timing belt tensioner (Figure 11, item X) as shown. Tension timing belt to obtain 1/8" (3 mm) deflection for 6 lb (3 Kg) of force at timing belt midpoint (Y). Tighten tensioner screw to 110 in-lb (12 Nm).
6. Install cover (Figure 12, item K) with four (4) screws (L). Tighten screws to 35 in-lb (4 Nm).

Preventive Maintenance and Adjustment

Drive or Driven Pulley Replacement

⚠ WARNING



Exposed moving parts can cause severe injury.
LOCK OUT POWER before removing guards or performing maintenance.

1. Complete steps 1 through 3 of “Timing Belt Replacement” section on page 9.
2. Remove taper-lock screws (Figure 15, item W). Insert one (1) of taper lock screws (Figure 15, item W) in remaining hole (Z). Tighten screw (W) until pulley is loose. Remove pulley and taper hub assembly.

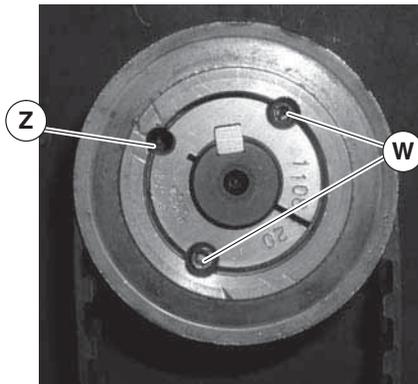


Figure 15

NOTE

If drive pulley (Figure 18, item J) is replaced, wrap timing belt around drive pulley and complete step 3.

3. Complete steps 6 through 9 of “Installation” section beginning on page 8.

Gear Reducer Replacement

⚠ WARNING



Exposed moving parts can cause severe injury.
LOCK OUT POWER before removing guards or performing maintenance.

1. Remove four (4) screws (Figure 12, item L) and remove cover (K).
2. Loosen M10 shaft locking screw (Figure 16, item AA).

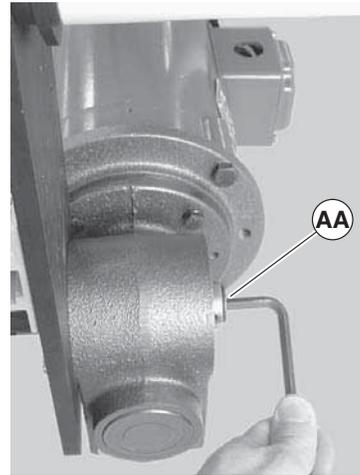


Figure 16

3. Loosen tensioner (Figure 13, item X).
4. Loosen taper-lock screws (Figure 17, item W) and remove drive pulley: Insert one (1) of taper lock screws (W) in remaining hole (Z). Tighten screw (W) until pulley is loose. Remove pulley (Figure 18, item J), taper hub assembly (AB), and timing belt (Q)

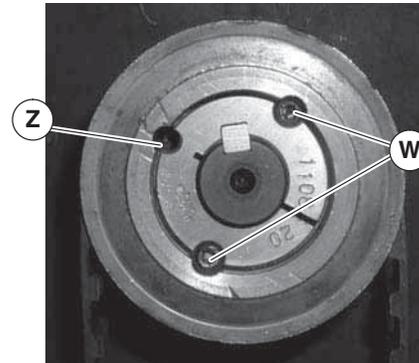


Figure 17

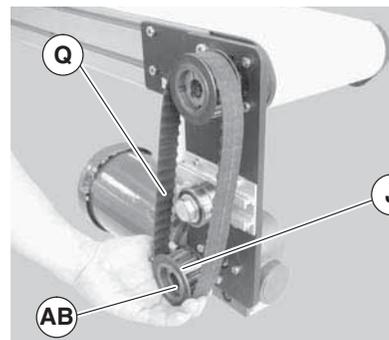


Figure 18

5. Remove four (4) gear reducer mounting screws (Figure 19, item R). Remove gearmotor.

Preventive Maintenance and Adjustment

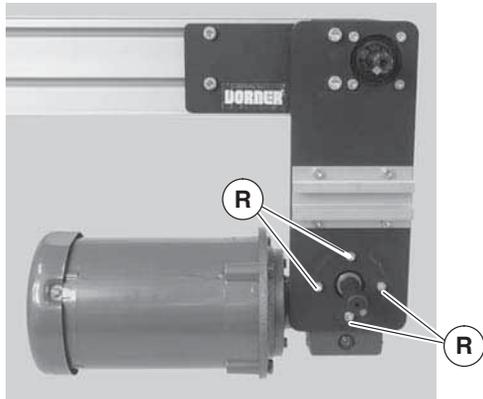


Figure 19

- Remove four screws (Figure 20, item AC). Detach motor (AD) from gear reducer (AE). Retain motor output shaft key (AF).

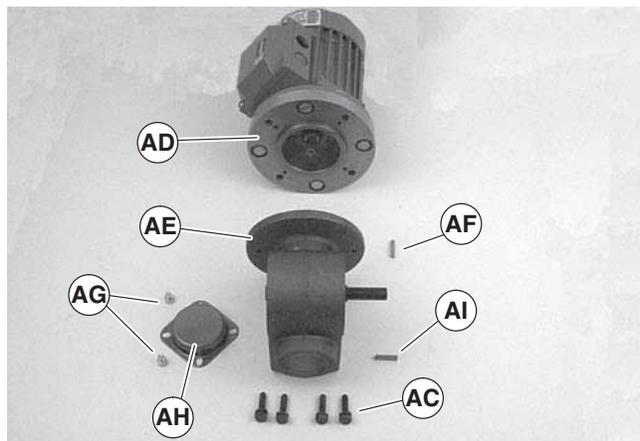


Figure 20

- Remove two (2) screws (AG) and detach output shaft cover (AH).
- Remove M10 shaft locking screw (Figure 21, item AA), remove gear reducer output shaft (AJ) and key (AI).

NOTE

Output shaft (Figure 21, item AJ) is held in Gear Reducer with a tapered press fit. Removal may require use of an arbor press.

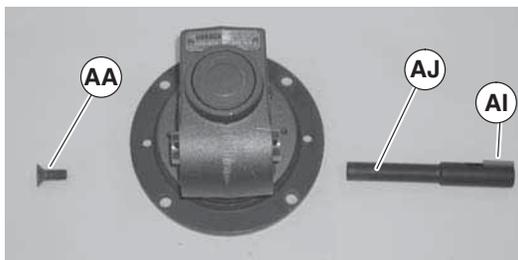


Figure 21

- Insert the new shaft with key (Figure 21, item AI) into new gear reducer. Tighten M10 shaft locking screw (AK) to 300 in-lbs (34 N-m).

IMPORTANT

Be extremely careful when coupling motor to gear reducer. Avoid misalignment and forcing the connection causing possible permanent gear reducer seal damage.

- With key (Figure 20, item AF) in keyway, slide motor (AD) and gear reducer (AE) together. Install screws (AC) and tighten.

NOTE

Gearmotor position on Flat Belt conveyor shown below left, Figure 22. Gearmotor position on Cleated Belt conveyor shown below right, Figure 22.

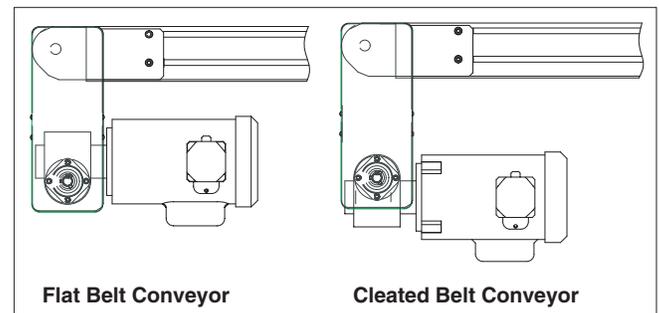


Figure 22

- Install gearmotor to mounting bracket and tighten screws (Figure 19, item R) to 110 in-lb (12 Nm).

NOTE

Drive pulley (Figure 18, item J) is removed. Wrap timing belt around drive pulley and complete step 12.

- Complete steps 6 through 9 of “Installation” section beginning on page 8.

Preventive Maintenance and Adjustment

Motor Replacement

⚠ WARNING



Exposed moving parts can cause severe injury.
LOCK OUT POWER before removing guards or performing maintenance.

⚠ DANGER



Hazardous voltage will cause severe injury or death.
LOCK OUT POWER BEFORE WIRING.

1. For single phase motor, unplug power cord from outlet.
2. For three phase and VFD variable speed motor:
 - a. Loosen terminal box screws (Figure 23, item AL) and remove cover (AM).

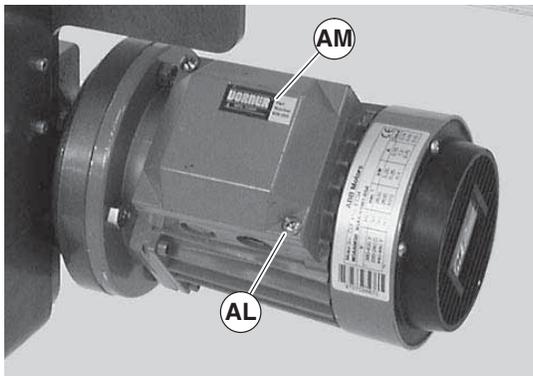


Figure 23

- b. Record wire colors on terminals 1, 2 and 3. Loosen wire nuts and remove wires 1, 2 and 3.
 - c. Loosen cord grip and remove cord.
3. For DC variable speed motor, unplug motor cord at disconnect (Figure 24, item AN).

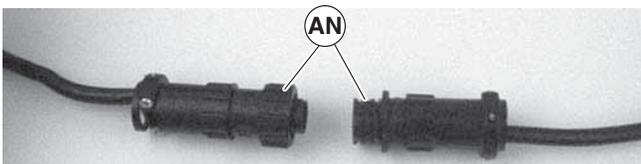


Figure 24

4. Remove four (4) screws (Figure 25, item AC). Detach motor (AD) from gear reducer (AE). Retain motor output shaft key (AF).

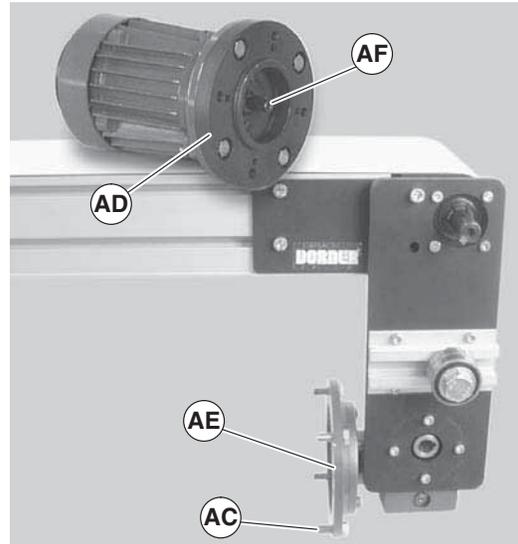


Figure 25

IMPORTANT

Be extremely careful when coupling motor to gear reducer. Avoid misalignment and forcing the connection causing possible permanent gear reducer seal damage.

5. With key (Figure 26, item AF) in keyway, slide motor (AD) and gear reducer together. Install screws (AC) and tighten.

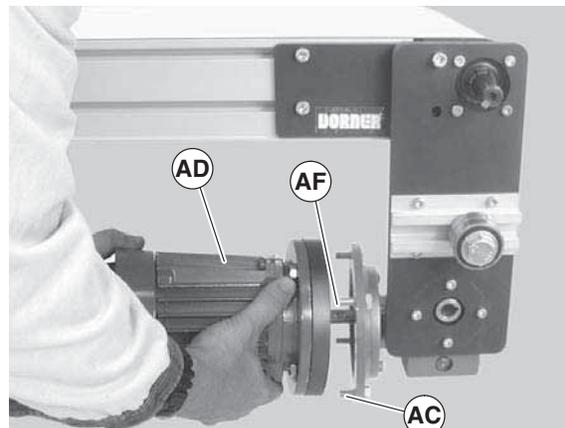


Figure 26

6. Replace wiring:
 - For a single phase motor, reverse step 1 on page 12.
 - For a three phase or VFD variable speed motor, reverse step 2 on page 12.
 - For a DC variable speed motor, reverse step 3 on page 12.

NOTE

For replacement parts other than those shown on this page, contact an authorized Dorner Service Center or the factory. Key Service Parts and Kits are identified by the Performance Parts Kits logo . Dorner recommends keeping these parts on hand.

3200 Series Conveyors Bottom Mount Drive Package for Standard Load 90° Industrial Gearmotors

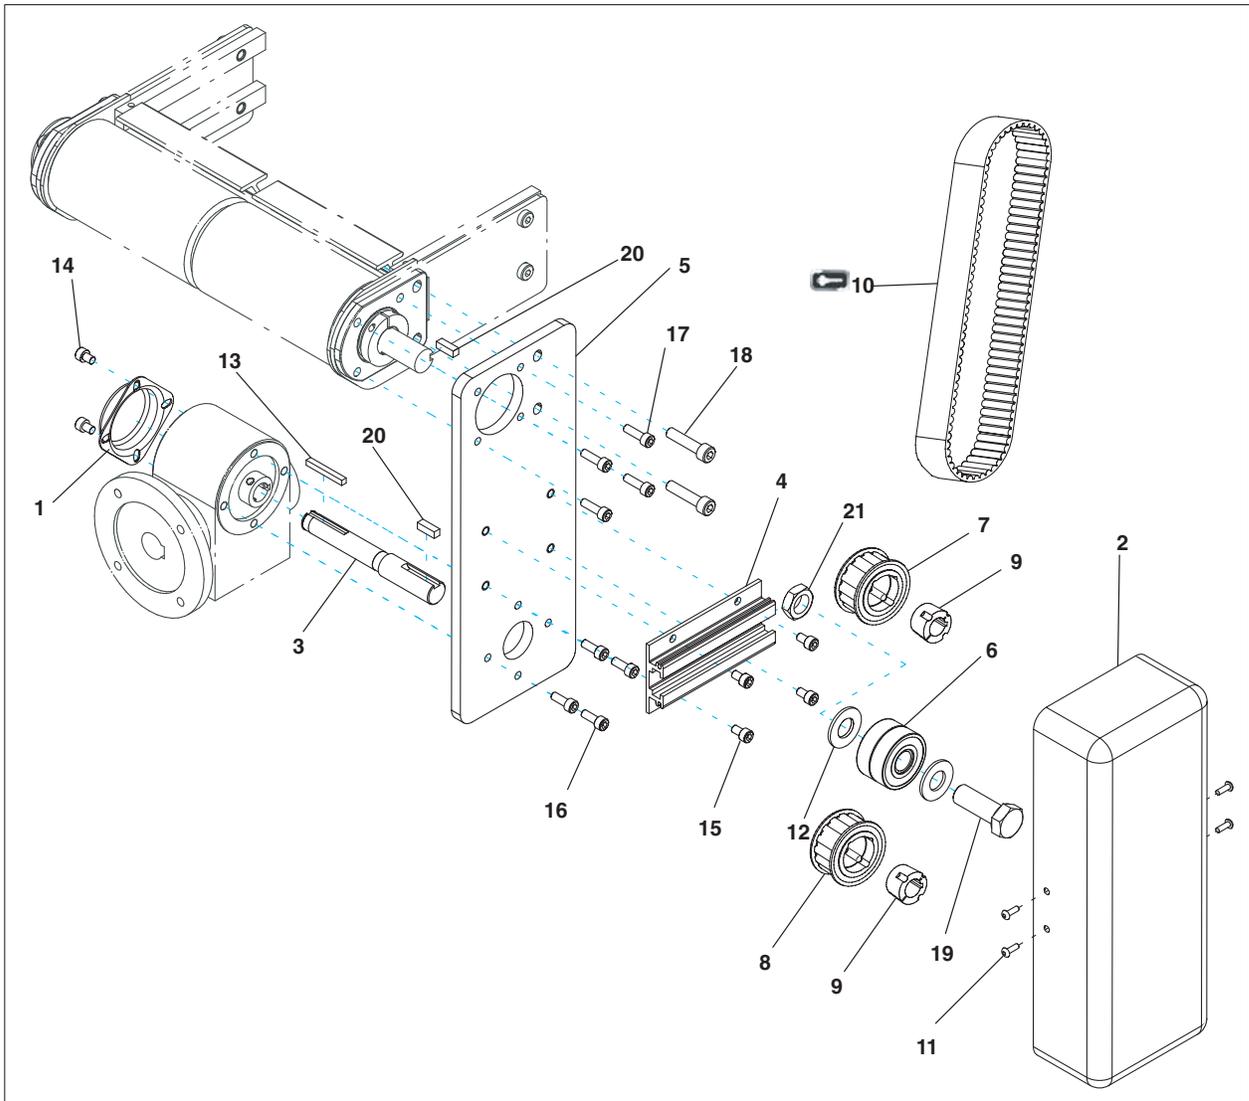


Figure 27

Item	Part Number	Description
1	300139	Bearing Shaft Cover
2	300871	Drive Cover
3	301146	Grove Gearhead Output Shaft
4	301076	Drive Tensioner Slide
5	301151	Mounting Plate
6	301153	Tensioner Bearing Assy

Item	Part Number	Description
7	811-123	Driven Pulley, 14 Tooth, Taper Lock TL1108
	811-126	Driven Pulley, 16 Tooth, Taper Lock TL1108

Service Parts

Item	Part Number	Description
8	811-126	Drive Pulley, 16 Tooth, Taper Lock TL1108
	811-127	Drive Pulley, 18 Tooth, Taper Lock TL1210
	811-135	Drive Pulley, 20 Tooth, Taper Lock TL1210
	811-136	Drive Pulley, 22 Tooth, Taper Lock TL1610
	811-137	Drive Pulley, 24 Tooth, Taper Lock TL1610
9	811-288	Taper Lock Bushing, 20MM, TL1108
	811-289	Taper Lock Bushing, 20MM, TL1210
	811-290	Taper Lock Bushing, 20MM, TL1610
10	814-059	Timing Belt, 1.0" W x 27.0" L
	814-060	Timing Belt, 1.0" W x 28.0" L
11	910412M	Button Head Screw M4 x 12mm
12	911-013	Flat Washer
13	912-084	Square Key
14	920608M	Socket Head Screw M6 x 8mm
15	920610M	Socket Head Screw M6 x 10mm
16	920616M	Socket Head Screw M6 x 16mm
17	920620M	Socket Head Screw M6 x 20mm
18	920835M	Socket Head Screw M8 x 35mm
19	961645M	Socket Head Screw M16 x 45mm
20	980632M	Square Key
21	991610M	Hex Jam Nut M16

Item	Part Number	Description	
1	62MS411FN	Motor, 0.25hp (0.19Kw), 115/230 Volts, 60 Hz, 1-Phase	
	62MS411FR	Motor, 0.25hp (0.19Kw), 115/230 Volts, 60 Hz, 1-Phase with Reversing	
	62MS423	Motor, 0.25hp (0.19Kw), 208-230/460 Volts, 60 Hz, 3-Phase	
	62MSD3DEN	Motor, 0.25hp (0.19Kw), 130 VDC	
	62MH411FN	Motor, 0.5hp (0.37Kw), 115/230 Volts, 60Hz, 1-Phase	
	62MH423	Motor, 0.5hp (0.37Kw) 208-230/460 Volts, 60Hz, 3 Phase	
	62MHD9DEN	Motor, 0.5hp (0.37Kw), 90VDC	
	32MS423EN	Motor, 0.5hp (0.37Kw), 230 Volts, 3 Phase Inverter Duty	
	2	32M005HL	Gear Reducer, 5:1, NEMA 42CZ
		32M010HL	Gear Reducer, 10:1, NEMA 42CZ
32M020HL		Gear Reducer, 20:1, NEMA 42CZ	
32M040HL		Gear Reducer, 40:1, NEMA 42CZ	
32M060HL		Gear Reducer, 60:1, NEMA 42CZ	
32M005HS		Gear Reducer, 5:1, NEMA 56C	
32M010HS		Gear Reducer, 10:1, NEMA 56C	
32M020HS		Gear Reducer, 20:1, NEMA 56C	
3	980636M	Pulley Key, 6 mm x 18 mm (2x)	
	301146	Gear Reducer Shaft	
4	912-084	Gear Reducer Key, Square, 0.188" x 1.5" L	
5	931025M	Flat Head Screw M10 x 25mm	

3200 Standard Load 90° Industrial Gearmotors

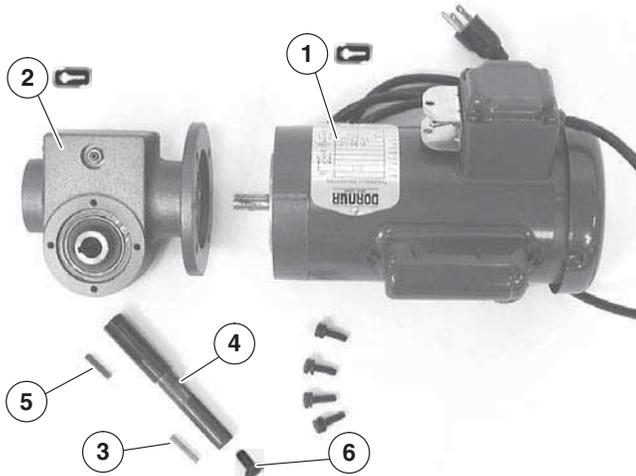


Figure 28

Return Policy

Returns must have prior written factory authorization or they will not be accepted. Items that are returned to Dorner without authorization will not be credited nor returned to the original sender. When calling for authorization, please have the following information ready for the Dorner factory representative or your local distributor:

1. Name and address of customer.
2. Dorner part number(s) of item(s) being returned.
3. Reason for return.
4. Customer's original order number used when ordering the item(s).
5. Dorner or distributor invoice number.

A representative will discuss action to be taken on the returned items and provide a Returned Goods Authorization number for reference.

There will be a return charge on all new undamaged items returned for credit where Dorner was not at fault. Dorner is not responsible for return freight on such items.

Conveyors and conveyor accessories	
Standard catalog conveyors	30%
MPB Series, cleated and specialty belt conveyors	50%
7400 & 7600 Series conveyors	non-returnable items
Engineered special products	case by case
Drives and accessories	30%
Sanitary stand supports	non-returnable items

Parts	
Standard stock parts	30%
MPB, cleated and specialty belts	non-returnable items

Returns will not be accepted after 60 days from original invoice date.

The return charge covers inspection, cleaning, disassembly, disposal and reissuing of components to inventory.

If a replacement is needed prior to evaluation of returned item, a purchase order must be issued. Credit (if any) is issued only after return and evaluation is complete.

Dorner has representatives throughout the world. Contact Dorner for the name of your local representative. Our Technical Sales, Catalog Sales and Service Teams will gladly help with your questions on Dorner products.

For a copy of Dorner's Warranty, contact factory, distributor, service center or visit our website at www.dorner.com.

For replacement parts, contact an authorized Dorner Service Center or the factory.



Dorner Mfg. Corp. reserves the right to change or discontinue products without notice. All products and services are covered in accordance with our standard warranty. All rights reserved. © Dorner Mfg. Corp. 2006

DORNER MFG. CORP.

975 Cottonwood Ave., PO Box 20
Hartland, WI 53029-0020 USA
USA
TEL 1-800-397-8664 (USA)
FAX 1-800-369-2440 (USA)
Internet: www.dorner.com

Outside the USA:
TEL 1-262-367-7600
FAX 1-262-367-5827