



2200 SERIES GRAVITY ROLLER CONVEYORS



*Move loads efficiently and economically
without the need for power!*

- T-slot integrates with stand, eliminating the need for mounting brackets
- Ergonomically designed to reduce injury
- Ideal for case and tote handling
- Light weight yet durable frame design
- Optional end stop available



Features & Specifications

- Loads up to 80 lbs/ft* (119 kg/m)
 - Conveyor load capacity depends on conveyor size, incline, accumulated loads and other factors.
- Conveyor Widths: 6" (152 mm), 12" (305 mm), 18" (457 mm) and 24" (610 mm)
- Conveyor Lengths: 2' (610 mm) to 12' (3,658 mm) in 6" (152 mm) increments
- Rollers:
 - 1" (25 mm) diameter rollers on 1.2" (31 mm), 2.4" (61 mm) or 3.6" (91 mm) centers
 - Anodized aluminum tube with steel ball bearing
- Side T-slot fits Dorner drop in hardware
- Lower T-slot fits standard M6 square nuts
- Standard lengths available in 6" increments

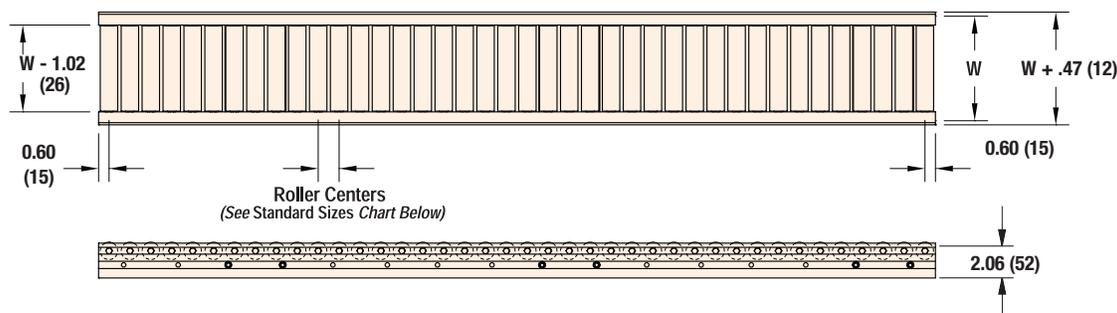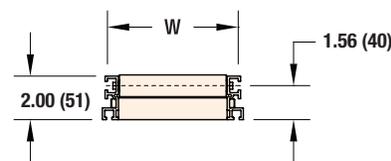

* All conveyors are shipped with a roller at each end. Depending on roller centers, one odd roller space may occur. All frames are punched for rollers 0.6" (15) from each end on 1.2" (31) centers.

DORNER MFG. CORP.
PO Box 20 • 975 Cottonwood Ave.
Hartland, WI 53029 USA

INSIDE THE USA
TEL: 800.397.8664
FAX: 800.369.2440

OUTSIDE THE USA
TEL: 262.367.7600
FAX: 262.367.5827

www.dorner.com
info@dorner.com

