

DORNER[®]

MOVE FAST. MOVE SMART.

2200 & 3200 SERIES VACUUM BELT CONVEYORS



Combining belt technology with engineered vacuum pumps to provide the optimum results!

- Hold flat parts of any material fast to the belt
- Ideal for elevation changes or part holding
- Can be used in upside down applications

Vacuum conveyors are made by perforating the belt and drawing air through grooves in the bed of a standard conveyor.

Features & Specifications

- Available on Dorner 2200 & 3200 Series Belt Conveyors
- Aluminum extruded frame with T-Slot construction
- Sealed ball bearings
- Rack and pinion belt tensioning
- End and center drive compatible
- Vacuum source is provided by a regenerative vacuum blower
- Reference the conveyor specification sheet or www.dorner.com for additional details and specifications

Belting


- Standard belting is recommended
- V-Guided and Non V-Guided belt compatible
- Friction belting is available for rigid parts like plastic caps, plastic bottles, ceramic wafers, glass ware, etc.
- Electrically conductive belting is available for thin product like paper, light cardboard, cloth, plastic film, etc.
- Note: Belt must be finger spliced

Options & Accessories

- Standard support stands are available
- Product guiding is generally not required or recommended
- All standard 2200 & 3200 Series mounting packages and gearmotors are available



Can be Used with a Variety of Vacuum Sources

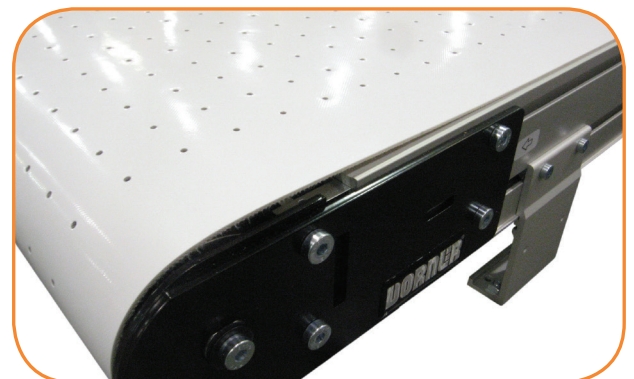

The Vacuum Area is Designed Custom for Each Application

DORNER MFG. CORP.
PO Box 20 • 975 Cottonwood Ave.
Hartland, WI 53029 USA

INSIDE THE USA
TEL: 800.397.8664
FAX: 800.369.2440

OUTSIDE THE USA
TEL: 262.367.7600
FAX: 262.367.5827

www.dorner.com
info@dorner.com

