


FLEXIBLE CHAIN CONVEYORS WITH PALLETS FOR PRODUCT ROUTING AND CONTROL



- Accurate positioning and routing
- Ideal for manual and automated assembly processes or inspection
- Components sold as kits to allow for easy design changes and layout flexibility
- Pallets sold as kits to allow fixturing or as completed assemblies

Merge & Diverts


- Multiple Kits styles
 - Divert, Merge, and Merge and Divert
 - Multiple configurations including 45°, 90° and Parallel
- Require pallet or puck stops to be used for product traffic control
- Designed for use with Pucks and Pallets with the Pin Tracking System
- Requires that the conveyor is equipped with guiding. Cutting and fitting of the guiding is required
- Pneumatic diverter. The gate arm location is below the Pin Tracking System, contacts the pallet base puck
- Pneumatic diverter position is adjustable in both positions
- Height of the divert arm is also adjustable

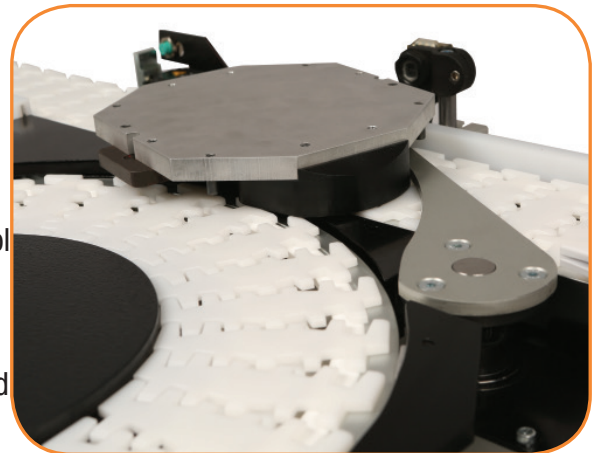

Diverts

Lift & Locate Station

- 105mm Conveyors
- ± 0.004" accuracy
- 91 kg (200 lbs) holding force
- Includes 1 pallet stop (cushioned or non-cushioned)
- Includes sensor mounts
- Sensors and pneumatic valves optional
- Max usable width = pallet width

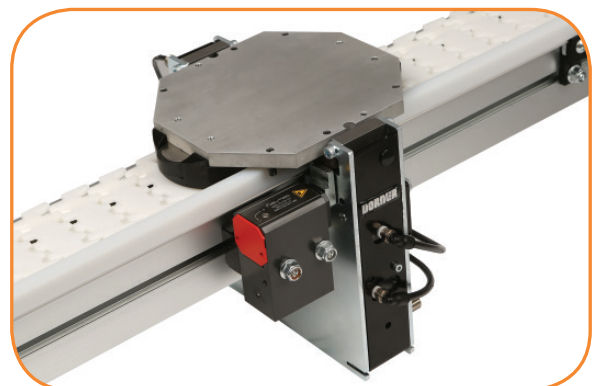

Lift & Locate

Pallets

- 105mm Conveyor
 - 190 mm wide
 - 100 mm, 150 mm, and 200 mm lengths
 - Max product load = 9 kg (20 lbs)
- Aluminum base plate [13 mm (1/2" thick)]
 - Thickness is dependent on load condition
- (2) Hardened steel location blocks
- Pin Tracking System
 - Pins guide pallet along conveyor
 - Pallet guide only needed on outside of loop
 - Pins provide accuracy at stop location
- Pallets can be purchased as completed assemblies or as kits allowing end user to fabricate their own top plate
- Bumper material available to reduce noise and vibration in accumulated pallets



Pallets



Cushioned Pallet Stop

Pallet Stops

- Pneumatic Stop
- Available in Cushioned & Non-Cushioned Models
- Capable of back to back pacing
- Up to 45 kg (100 lbs) total per pallet stop @ 30 MPM (100 FPM)
- Lower speed increases load capacity
- Higher load options available
- Sensor brackets available either on the stop or as a stand alone part
- Optional stop position sensors available

Transforming Conveyor Automation

www.dorner.com



© Dorner Mfg. Corp. 2019. All Rights Reserved. 851-789 REV B 0519

Dorner – North & South America

Dorner – U.S.A. Headquarters

975 Cottonwood Ave
Hartland, WI 53029, USA
(800) 397-8664
(262) 367-7600
info@dorner.com

Dorner – Canada

100-5515 North Service Road
Burlington, Ontario L7L 6G6
Canada
(289) 208-7306
info@dorner.com

Dorner – Latin America

Carretera a Nogales #5297, Nave 11.
Parque Industrial Nogales
Zapopan, Jalisco C.P. 45222 México
+52.33.30037400 | info.latinamerica@dorner.com

Dorner – Europe

Karl-Heinz-Beckurts-Straße 7
52428 Jülich, Germany
+49 (0) 2461/93767-0 | info.europe@dorner.com

Dorner – Asia

128 Jalan Permatang Damar Laut, Bayan Lepas 11960
Penang, Malaysia
+604-626-2948 | info.asia@dorner.com