



SPECIFICATIONS

- Belted and Cleated Belt Models
- Loads up to 22.7 kg (50 lbs)
- Widths: 70 mm (2.75 in) to 457 mm (18 in)
- Lengths: 500 mm (19.7 in) to 5,485 mm (18 ft)
- Available in straights only

INNOVATIVE AND DURABLE


- Robust 304 stainless steel welded frame with minimal horizontal surfaces
- Designed for wipe down and low pressure wash-down with non-caustic chemicals
- Tip-up tails for access inside the conveyor for cleaning and maintenance
- Compact and enclosed tensioning system provides smooth and snag-free cleaning
- Carriage bolt on guiding for easy set up



The AquaGard LP (low profile) is the latest iteration in the AquaGard sanitary conveyor platform. Its sleek, low profile build is specifically designed to fit in tight spaces.

FEATURES

- Quick, five-minute belt change for increased uptime
- Bolt slider mechanism for fast, single point belt tensioning
- V-Groove frame with V-Guided belt ensures accurate tracking
- Streamlined design fits where other conveyors do not
- Low profile, robust welded frame design, for easy cleaning
- Small 32 mm (1.25 in) diameter end rollers for transfer of small products

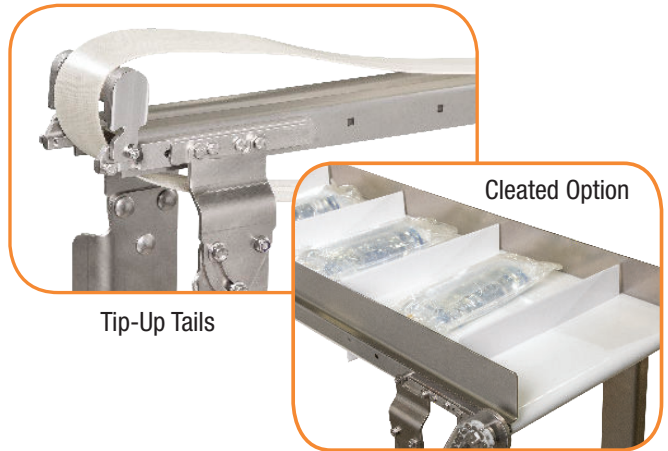

Tip-Up Tails

Cleated Option

INDUSTRY INFORMATION

- Designed and manufactured to food equipment standards
- BISSC certified conveyors
- FDA approved materials and components
- Washdown rated gearmotors and controls

Contact Your Dorner Representative Today or
Call Dorner at 1-262-367-7600 to Learn More About This New Technology!

dornerconveyors.com | info@dorner.com | 800-397-8664 | +1-262-367-7600