

Fast and Effective
Cleaning Capability

Open Frame
Tool-less Design

Innovative Staggered
Sidewall Belts

Quick Belt
Change



*Aqua***Pruf**[®]
VBT

**VERTICAL BELT
TECHNOLOGY**

Sanitary Vertical Belt Conveyors
for Elevating Bulk Products

DORNER[®]
By Columbus McKinnon

AquaPruf Vertical Belt Technology is best for:

Elevating bulk product such as:

- Vegetables
- Fruits, Grains and Nuts
- Popcorn
- Pet Foods
- Pharmaceuticals
- Small packages

Industries:

- Food
- Pharmaceutical
- Chemical

Applications:

- Elevation for walk-thru
- Hopper feeding
- Weigh scale feeding
- General bulk handling
- Sanitary environments

Sizes

Lengths – Infeed and Exit

- Minimum length: 508 mm (20 in)
- Maximum length: 1828.8 mm (72 in)
- Length increments: 6.35 mm (1/8 in)

Heights

- Minimum infeed TOB: 406.4 mm (16 in)
- Minimum outfeed TOB: 1828.8 mm (72 in)
- Maximum outfeed TOB: 6096 mm (240 in)
- Height increments: 6.35 mm (1/8 in)

Belt Width mm (in)	Pocket Width mm (in)	Full Pocket Capacity cubic m (ft)	½ Full Pocket Capacity cubic m (ft)
304.8 (12)	160.02 (6.3)	0.0006 (0.022)	0.0003 (0.011)
355.6 (14)	210.82 (8.3)	0.0008 (0.029)	0.0004 (0.014)
406.4 (16)	261.62 (10.3)	0.0010 (0.036)	0.0005 (0.018)
457.2 (18)	312.42 (12.3)	0.0012 (0.043)	0.0006 (0.022)
508 (20)	363.22 (14.3)	0.0014 (0.051)	0.0007 (0.025)
558.8 (22)	414.02 (16.3)	0.0016 (0.058)	0.0008 (0.029)
609.6 (24)	464.82 (18.3)	0.0018 (0.065)	0.0009 (0.033)

Speeds

- Belt Speed up to 30.48 m/min (100 ft/min)

Belting

- Solid Urethane Belting with 51 mm (2 in) pitch positive drive lugs
- 89 mm (3.5 in) tall RF welded scoop cleat
- 89 mm (3.5 in) tall RF welded staggered sidewall
- Pocket Spacing
 - Minimum: 152.4 mm (6 in)
 - Maximum: 457.2 mm (18 in)
 - Spacing Increments: 51 mm (2 in)
- Modular Belt version also available. Contact factory for details.



Modular Belt version also available.

Maximum Product Capacity

Belt Width (in)	Pocket Width (in)	At 15.24 m/min (50 ft/min) Belt Speed and 6 in Spacing:			At 30.48 m/min (100 ft/min) Belt Speed and 6 in Spacing:		
		Full Pocket cubic m/hour (ft/hour)	2/3 Full Pocket cubic m/hour (ft/hour)	1/2 Full Pocket cubic m/hour (ft/hour)	Full Pocket cubic m/hour (ft/hour)	2/3 Full Pocket cubic m/hour (ft/hour)	1/2 Full Pocket cubic m/hour (ft/hour)
304.8 (12)	160.02 (6.3)	3.68 (130)	2.44 (86)	1.84 (65)	7.36 (260)	4.90 (173)	3.68 (130)
355.6 (14)	210.82 (8.3)	4.90 (173)	3.26 (115)	2.44 (86)	9.83 (347)	6.541 (231)	4.90 (173)
406.4 (16)	261.62 (10.3)	6.14 (217)	4.08 (144)	30.75 (108)	12.29 (434)	8.18 (289)	6.14 (217)
457.2 (18)	312.42 (12.3)	7.36 (260)	4.90 (173)	3.68 (130)	14.72 (520)	9.83 (347)	7.36 (260)
508 (20)	363.22 (14.3)	8.58 (303)	5.72 (202)	4.28 (151)	17.19 (607)	11.47 (405)	8.58 (303)
558.8 (22)	414.02 (16.3)	9.83 (347)	6.54 (231)	4.90 (173)	19.65 (694)	13.11 (463)	9.83 (347)
609.6 (24)	464.82 (18.3)	11.04 (390)	7.36 (260)	5.52 (195)	22.12 (781)	14.72 (520)	11.04 (390)

Open Frame/Tool-Less Sanitary Design

- Continuous TIG welded 304 stainless steel frame
- #4 Polish on all surfaces
- Open frame and tool-less design for ease of cleaning
- Drive Gearmotor located on main column outside food drop zone



Staggered Sidewall Belt

- Staggered Sidewall Belt provides 15% more pocket capacity than a traditional sidewall belt
- Self-Releasing Sidewall improves product release
- Consistent RF Bonded Staggered Sidewall with 80% less bond area
- Staggered Sidewalls can be individually and easily repaired if damaged
- Clean through Side Wall Design improves clean-ability and reduces cleaning time and water usage



Quick Belt Change

- Quick Change open frame design allows belt change in approximately 20 minutes
- Tool-less removal of idlers and belt supports
- Loose belt drops down main column
- No belt tensioning needed



The Benefits of a Dorner AquaPruf Vertical Belt Technology

- **Innovative Offering**
 - Open frame design for quick cleaning and more effective product changeover
 - New, unique staggered sidewall belt improves pocket capacity
 - Quick belt change in approximately 20 minutes
- **Delivers Fast**
 - Dorner sets the industry standard for rapid delivery
 - Customizable product sizes available in 25 days or less
- **Industry Ready**
 - Designed and manufactured to food equipment standards
 - FDA Approved and USDA Certified Food Safe belt material
 - Motor located on main column outside of food drop zone



Industrial




Flexible Chain



Pallet Systems



Sanitary Stainless Steel

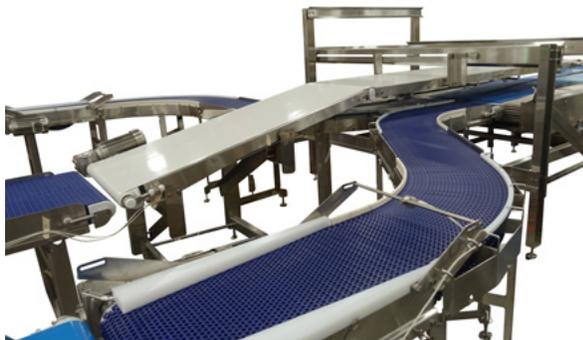

Engineered Solutions Group

Custom engineered solutions for almost any application.



CAD Configurator Tool

Industry leading tool! Configure your own custom conveyor in minutes.

TRANSFORMING CONVEYOR AUTOMATION

Contact Dorner

United States
+1-262-367-7600

Canada
+1-289-208-7306

Mexico
+52.33.30037400

Germany
+49 (0) 2461/93767-0

France
+33 (0)1 84 73 24 27

Malaysia
+604-626-2948



By Columbus McKinnon

DORNERCONVEYORS.COM



MAGNETEK

montratec

CONVEYANCE SOLUTIONS

© Dorner Mfg. Corp. 2024. All Rights Reserved.

851-811 0524