



Photo Eye Kits & Photo Eye Bracket Kits

Installation, Maintenance & Parts Manual



Photo Eye Kit



Photo Eye Bracket Kit

DORNER MFG. CORP.
P.O. Box 20 • 975 Cottonwood Ave.
Hartland, WI 53029-0020 USA

INSIDE THE USA
TEL: 1-800-397-8664
FAX: 1-800-369-2440

OUTSIDE THE USA
TEL: 262-367-7600
FAX: 262-367-5827

For other service manuals visit our website at:
www.dorner.com/service_manuals.asp

Warnings - General Safety

WARNING

The safety alert symbol, black triangle with exclamation, is used to alert you to potential personal injury hazards.

DANGER



Climbing, sitting, walking or riding on conveyor will cause severe injury.
KEEP OFF CONVEYORS.

DANGER



DO NOT OPERATE CONVEYORS IN AN EXPLOSIVE ENVIROMENT.

WARNING

Controller must be properly grounded.
Failure to properly ground controller may cause injury to personnel.

DANGER



Hazardous voltage will cause severe injury or death.
LOCKOUT POWER BEFORE WIRING.

WARNING



Exposed moving parts can cause severe injury.
DO NOT ATTEMPT ADJUSTMENTS WITH CONVEYOR RUNNING.

WARNING



Dorner cannot control the physical installation and application of conveyors. Taking protective measures is the responsibility of the user.

When conveyors are used in conjunction with other equipment or as part of a multiple conveyor system, **CHECK FOR POTENTIAL PINCH POINTS** and other mechanical hazards before system start-up.

Photo Eye Kit

Refer to Figure 1 for typical components.

Typical Components

1. Photo Eye Assembly
2. Reflector Assembly
3. M6-1.00 16mm Low Head Cap Screws (x4)
4. Drop In T-Bars (x2)

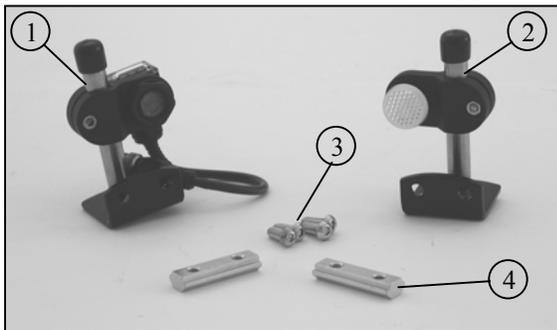


Figure 1

Photo Eye Bracket Kit

Refer to Figure 2 for typical components.

Typical Components

1. Photo Eye Bracket Assembly
2. Reflector Assembly
3. M6-1.00 16mm Low Head Cap Screws (x4)
4. Drop In T-Bars (x2)

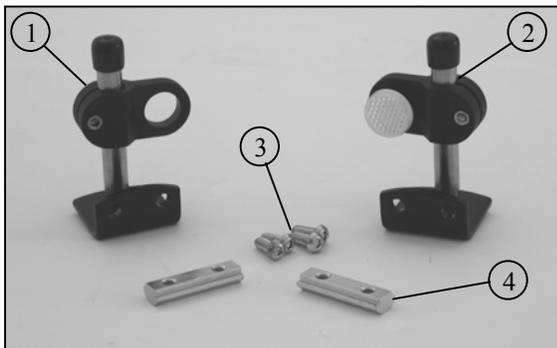


Figure 2

Linking Cable Kit

Refer to Figure 3 for typical components.

Typical Components

1. Cable - 4P Micro Connect
2. Wire Ties (x3)
3. Drop In T-Bars (x3)
4. M6-1.00 20mm Low Head Cap Screws (x3)
5. Mounting Cable Ties (x3)
6. T-Slot Strip Closures (x3)
7. Hex Key

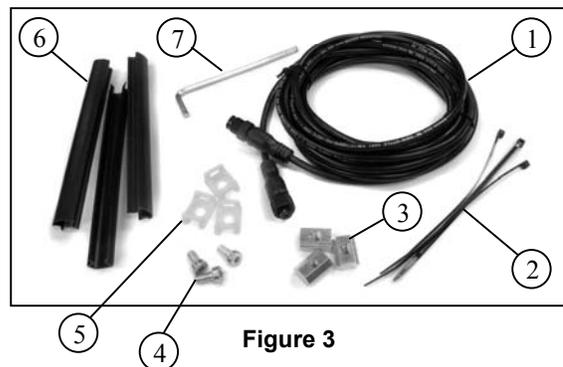


Figure 3

Installation

Required Tools

6 mm hex head wrench

Mounting to Conveyor

1. Install t-bars (Figure 4, item 1) into conveyor t-slot.

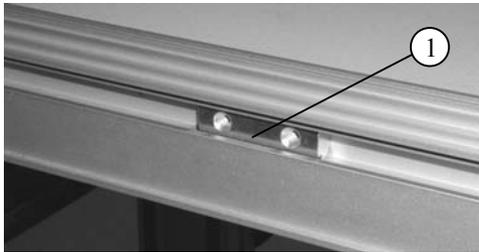


Figure 4

2. Attach photo eye assembly (Figure 5, item 1) to conveyor with screws (Figure 5, item 2).

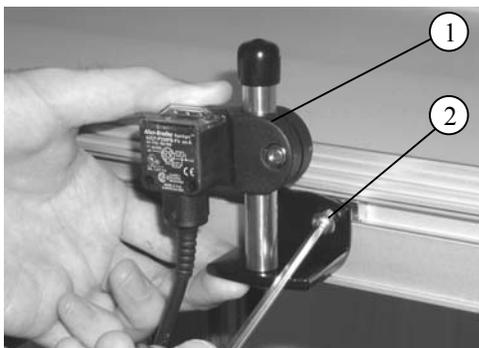


Figure 5

3. Slide photo eye to its desired mounting location along conveyor and tighten both screws.
4. Repeat steps 1-3 for the reflector assembly on opposite side on the conveyor.
5. Attach linking cable to photo eye assembly cable. As shown in Figure 6



Figure 6

Linking Cable Kit

1. To contain a long run of wiring cable in the conveyor t-slot, use several short lengths of t-slot strip closures (Figure 7, item 1).

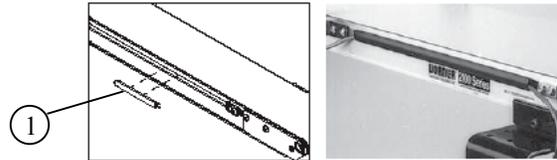


Figure 7

2. To route cable over a previously mounted component or to anchor the cable use the mounting cable ties (Figure 8, item 1) and single drop-in t-bars (Figure 8, item 2). Secure with screws (Figure 8, item 3).

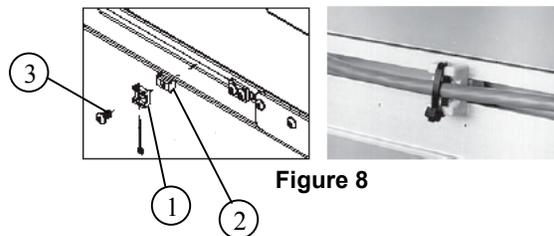


Figure 8

3. Figure 9 shows a typical wire routing of an accessory kit connection to the conveyor using the conveyors t-slot with both t-slot strip closures and wire ties.



Figure 9

Conveyor End Stop

Conveyor will run until the photo eye is blocked.

To create an end stop application, connect the photo eye cable (Figures 10 or 11, item 1) to the blue port (Figures 10 or 11, item 2) on the bottom of the controller.

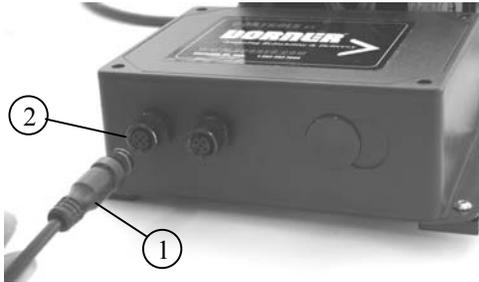


Figure 10
Single Input VFD Motor Control

Conveyor Indexing

Conveyor is stopped and will run when the photo eye is blocked.

To create an indexing application, connect the photo eye cable (Figures 12 or 13, item 1) to the green port (Figures 12 or 13, item 2) on the bottom of the controller.

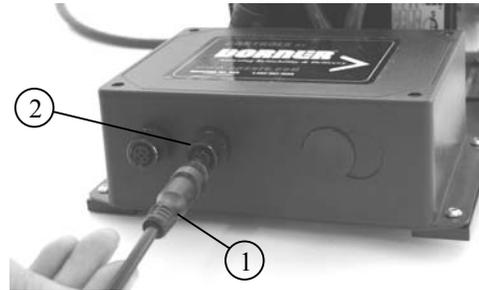


Figure 12
Single Input VFD Motor Control

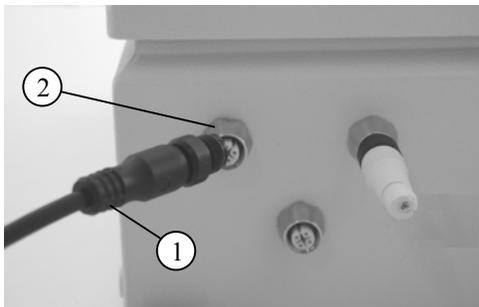


Figure 11
Dual Input VFD Motor Control

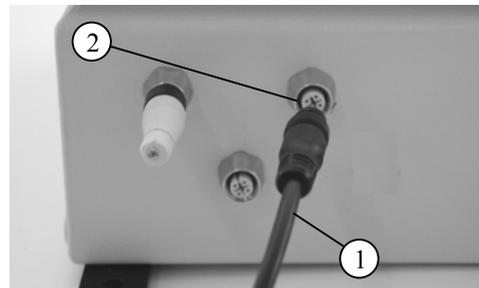


Figure 13
Dual Input VFD Motor Control

For dual input VFD Motor Controller see Motor Controls manual 851-614 for indexing time delay adjustment options in Preventive Maintenance and Adjustment section.

Applications

To Add Push Button "Bypass Option"

The bypass option will allow the conveyor to run while the push button is pressed independent of the photo eye.

Single Input VFD Motor Control

1. Connect push button to unused accessory port (Figure 14, items 1).

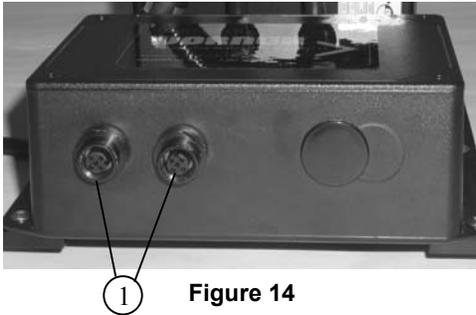


Figure 14

Dual Input VFD Motor Control

1. Connect push button to the user selectable port (Figure 15, items 1).



Figure 15

2. Move the internal jumper (Figure 16, item 1) to the left to bypass the device in the blue port. Move the jumper to the right to bypass the device in the green port.

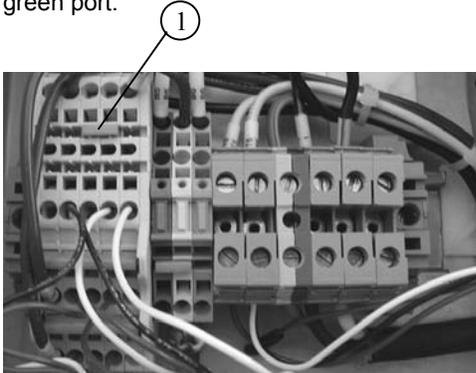


Figure 16

Jumper in the neutral position (Figure 17, item 1). The user selectable port will have no function (factory default).

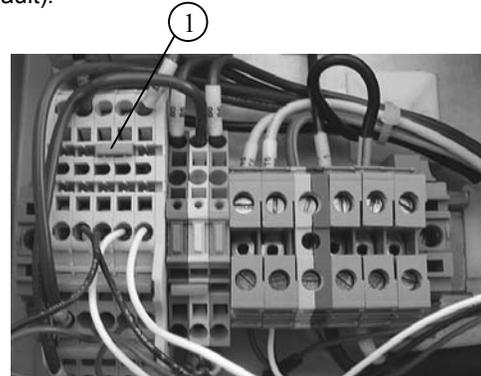


Figure 17

Jumper in the "Left" or blue port position (Figure 18, item 1). The user selectable port will function the same as the blue port.

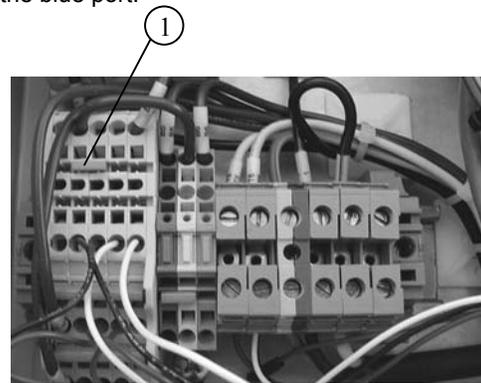


Figure 18

Jumper in the "Right" or green port position (Figure 19, item 1). The user selectable port will function the same as the green port.


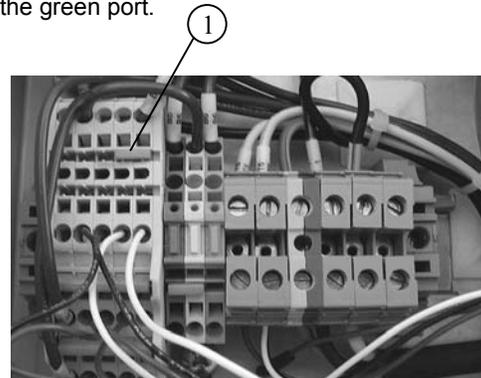


Figure 19

NOTE

For replacement parts other than those shown in this section, contact an authorized Dorner Service Center or the factory. Key Service Parts are identified by the Performance Parts Kits logo . Dorner recommends keeping these parts on hand.


Photo Eye Kit

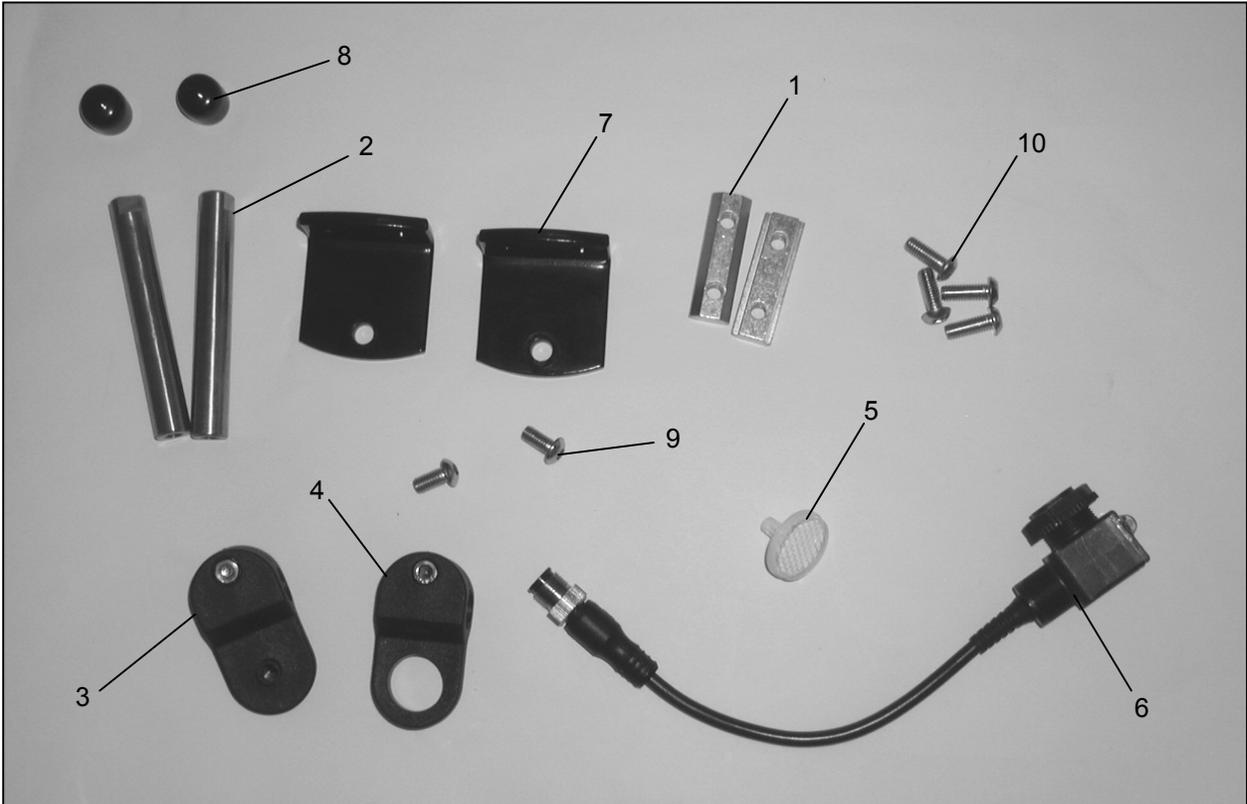

Item	Part Number	Description
1	200830M	Drop-In T-Bar
2	201104	2" Mounting Sensor Shaft
	202027M	5" Mounting Sensor Shaft
3	807-1390	Reflector Mount Clamp
4	807-1391	Photo-Eye Mount Clamp
5	809-289	Reflector Sensor
6	809-315	Photo-Eye Sensor
7	202004	Mounting Bracket
8	807-948	Shaft Cap
9	920692M	Low Head Cap Screw M6-1.00 x 12mm
10	920693M	Low Head Cap Screw M6-1.00 x 16mm


Service Parts

Photo Eye Bracket Kit - Reflective

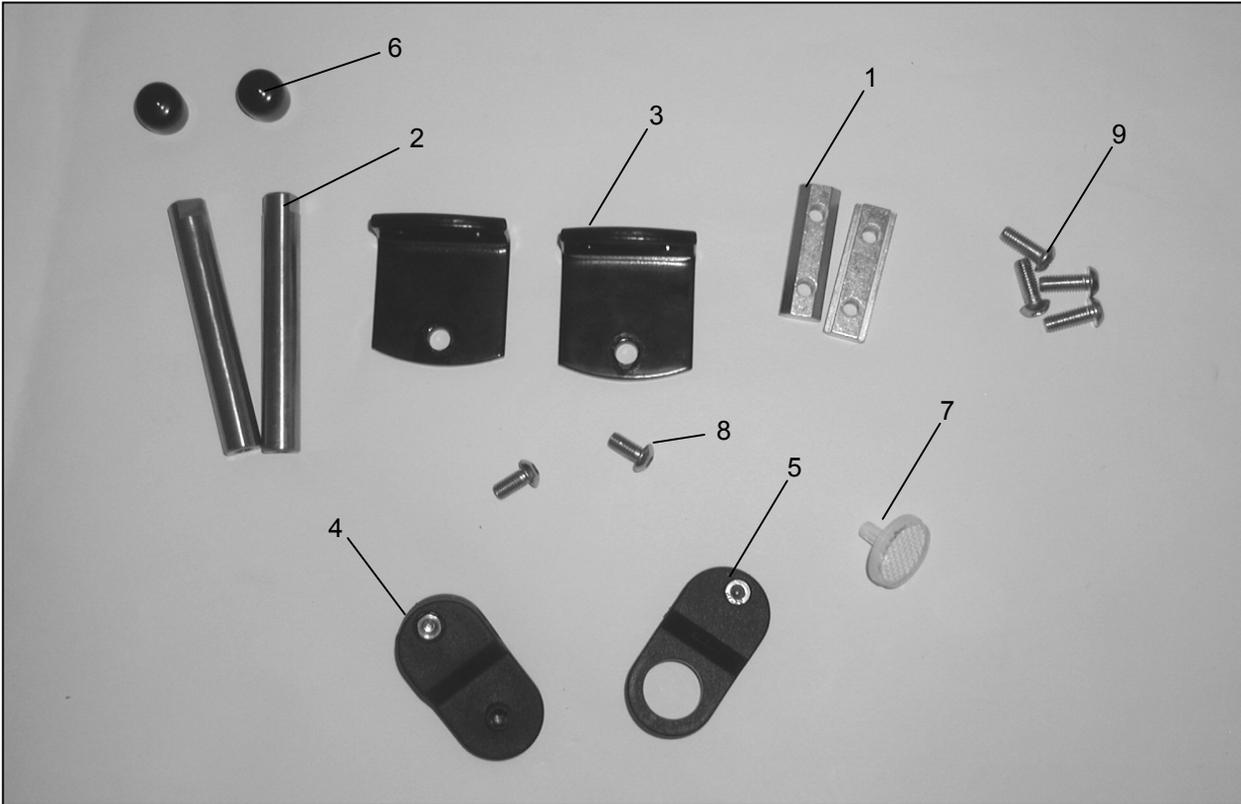

Item	Part Number	Description
1	200830M	Drop-In T-Bar
2	201104	2" Mounting Sensor Shaft
	202027M	5" Mounting Sensor Shaft
3	202004	Mounting Bracket
4	807-1390	Reflector Mount Clamp
5	807-1391	Photo-Eye Mount Clamp
6	807-948	Shaft Cap
7	809-289	Reflector Sensor
8	920692M	Low Head Cap Screw M6-1.00 x 12mm
9	920693M	Low Head Cap Screw M6-1.00 x 16mm


Photo Eye Bracket Kit - Through Beam

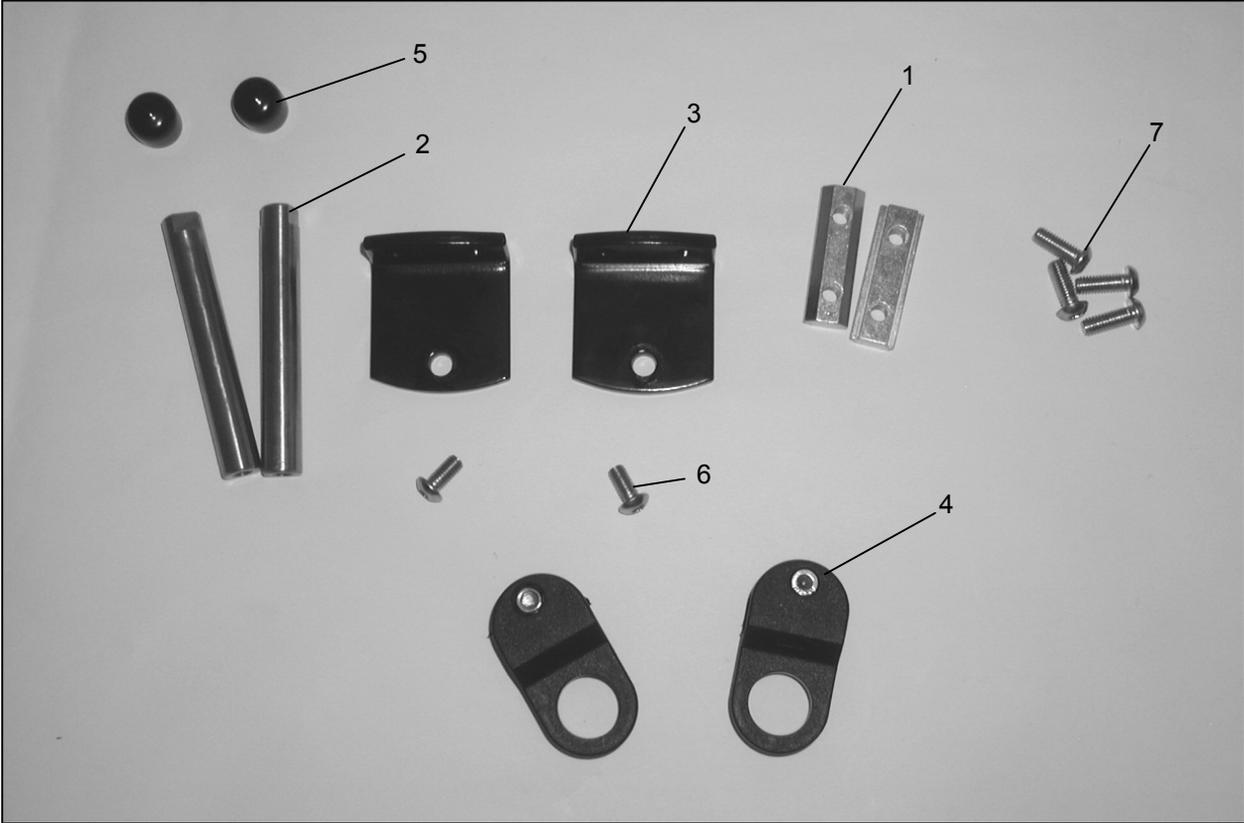

Item	Part Number	Description
1	200830M	Drop-In T-Bar
2	201104	2" Mounting Sensor Shaft
	202027M	5" Mounting Sensor Shaft
3	202004	Mounting Bracket
4	807-1391	Photo-Eye Mount Clamp
5	807-948	Shaft Cap
6	920692M	Low Head Cap Screw M6-1.00 x 12mm
7	920693M	Low Head Cap Screw M6-1.00 x 16mm

Service Parts

Photo Eye Bracket Kit - Convergence

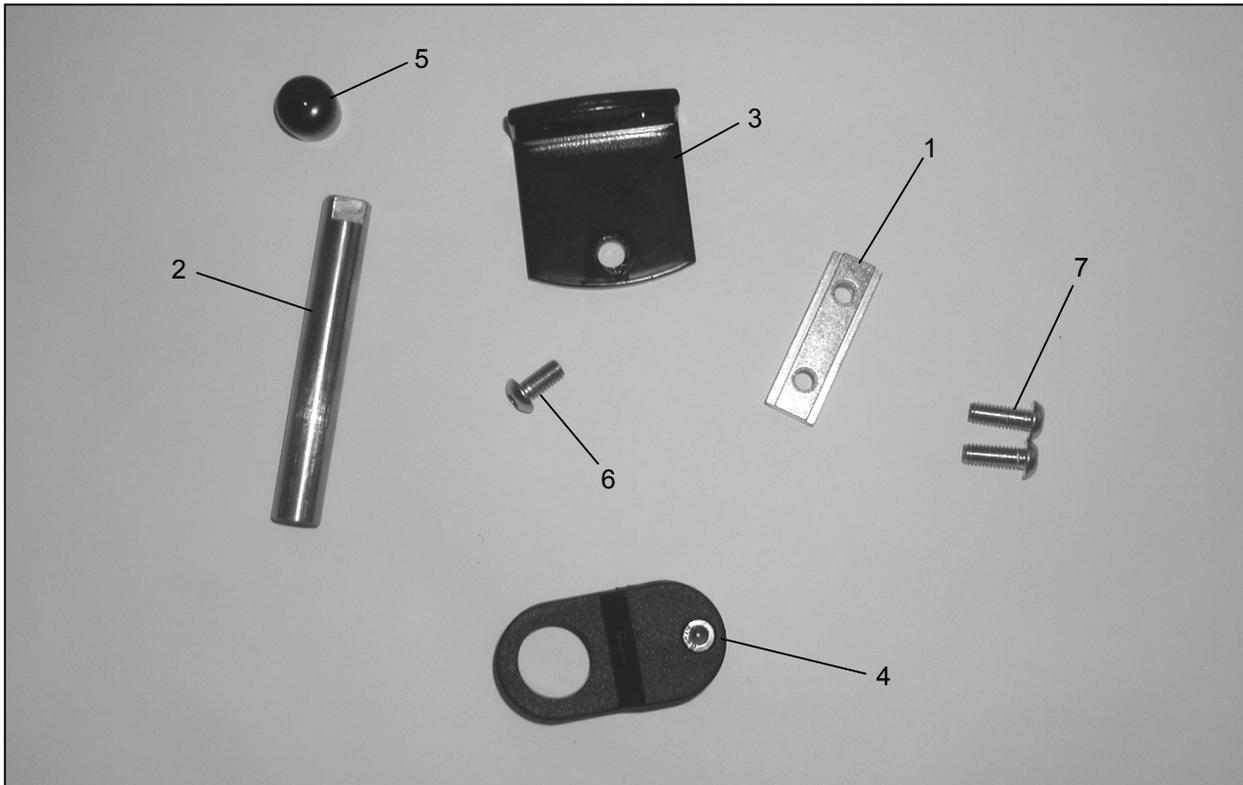

Item	Part Number	Description
1	200830M	Drop-In T-Bar
2	201104	2" Mounting Sensor Shaft
	202027M	5" Mounting Sensor Shaft
3	202004	Mounting Bracket
4	807-1391	Photo-Eye Mount Clamp
5	807-948	Shaft Cap
6	920692M	Low Head Cap Screw M6-1.00 x 12mm
7	920693M	Low Head Cap Screw M6-1.00 x 16mm

Linking Kit



Item	Part Number	Description
1	639971M	Single Drop-In T-Bar
2	675232	T-Slot Strip Closure
3	805-063	Wire Tie
4	805-608	Mounting Cable Tie
5	807-565	Hex Key
6	809-312	2 meter Cable
	809-313	5 meter Cable
7	920692M	Low Head Cap Screw M6-1.00 x 12mm

Return policy

Returns must have prior written factory authorization or they will not be accepted. Items that are returned to Dorner without authorization will not be credited nor returned to the original sender. When calling for authorization, please have the following information ready for the Dorner factory representative or your local distributor:

1. Name and address of customer.
2. Dorner part number(s) of item(s) being returned.
3. Reason for return.
4. Customer's original order number used when ordering the item(s).
5. Dorner or distributor invoice number.

A representative will discuss action to be taken on the returned items and provide a Returned Goods Authorization number for reference.

There will be a return charge on all new undamaged items returned for credit where Dorner was not at fault. Dorner is not responsible for return freight on such items.

Conveyors and conveyor accessories

Standard catalog conveyors	30%
MPB Series, cleated and specialty belt conveyors	50%
7400 & 7600 Series conveyors	non-returnable items
Engineered special products	case by case
Drives and accessories	30%
Sanitary stand supports	non-returnable items

Parts

Standard stock parts	30%
MPB, cleated and specialty belts	non-returnable items

Returns will not be accepted after 60 days from original invoice date.

The return charge covers inspection, cleaning, disassembly, disposal and reissuing of components to inventory.

If a replacement is needed prior to evaluation of returned item, a purchase order must be issued. Credit (if any) is issued only after return and evaluation is complete.

Dorner has representatives throughout the world. Contact Dorner for the name of your local representative. Our Technical Sales, Catalog Sales and Service Teams will gladly help with your questions on Dorner products.

For a copy of Dorner's Warranty, contact factory, distributor, service center or visit our website at www.dorner.com.

For replacement parts, contact an authorized Dorner Service Center or the factory.



Dorner Mfg. Corp. reserves the right to change or discontinue products without notice. All products and services are covered in accordance with our standard warranty. All rights reserved. © Dorner Mfg. Corp. 2006

Dorner Mfg. Corp.
975 Cottonwood Ave., PO Box 20
Hartland, WI 53029-0030 USA

USA
TEL 1-800-397-8664
FAX 1-800-369-2440

Outside the USA
TEL 1-262-367-7600
FAX 1-262-367-5827

Internet: www.dorner.com